

### SKiiP 83 AC 06 - SKiiP 83 AC 06 I

Absolute Maximum Ratings		
Symbol	Conditions <sup>1)</sup>	Units
Inverter		
$V_{CES}$		600 V
$V_{GES}$		$\pm 20$ V
$I_C$	$T_{heatsink} = 25 / 80 \text{ }^\circ\text{C}$	100 / 70 A
$I_{CM}$	$t_p < 1 \text{ ms}; T_{heatsink} = 25 / 80 \text{ }^\circ\text{C}$	200 / 140 A
$I_F = -I_C$	$T_{heatsink} = 25 / 80 \text{ }^\circ\text{C}$	130 / 88 A
$I_{FM} = -I_{CM}$	$t_p < 1 \text{ ms}; T_{heatsink} = 25 / 80 \text{ }^\circ\text{C}$	260 / 186 A
$T_j$		$-40 \dots +150$ $^\circ\text{C}$
$T_{stg}$		$-40 \dots +125$ $^\circ\text{C}$
$V_{isol}$	AC, 1 min.	2500 V

Characteristics					
Symbol	Conditions <sup>1)</sup>	min.	typ.	max.	Units
IGBT - Inverter					
$V_{CEsat}$	$I_C = 100 \text{ A}; T_j = 25 (125) \text{ }^\circ\text{C}$	–	2,1(2,2)	2,7(2,8)	V
$t_{d(on)}$	$V_{CC} = 300 \text{ V}; V_{GE} = \pm 15 \text{ V}$ $I_C = 100 \text{ A}; T_j = 125 \text{ }^\circ\text{C}$ $R_{gon} = R_{goff} = 11 \text{ }^\Omega$ inductive load	–	60	120	ns
$t_r$		–	80	160	ns
$t_{d(off)}$		–	330	500	ns
$t_f$		–	550	830	ns
$E_{on} + E_{off}$		–	15	–	mJ
$C_{ies}$	$V_{CE} = 25 \text{ V}; V_{GE} = 0 \text{ V}, 1 \text{ MHz}$	–	5,6	–	nF
$R_{thjh}$	per IGBT	–	–	0,5	K/W

Diode <sup>2)</sup> - Inverter					
$V_F = V_{EC}$	$I_F = 100 \text{ A}; T_j = 25 (125) \text{ }^\circ\text{C}$	–	1,5(1,45)	1,7(1,7)	V
$V_{TO}$	$T_j = 125 \text{ }^\circ\text{C}$	–	0,85	0,9	V
$r_T$	$T_j = 125 \text{ }^\circ\text{C}$	–	6	8	m $\Omega$
$I_{RRM}$	$I_F = 100 \text{ A}, V_R = -300 \text{ V}$	–	60	–	A
$Q_{rr}$	$di_F/dt = -800 \text{ A}/\mu\text{s}$	–	7,0	–	$\mu\text{C}$
$E_{off}$	$V_{GE} = 0 \text{ V}, T_j = 125 \text{ }^\circ\text{C}$	–	3,0	–	mJ
$R_{thjh}$	per diode	–	–	0,75	K/W



Current sensor for three phase output ac current (SKiiP 83 AC 06 I)					
$I_{p \text{ RMS}}$	Continuous current, $T = 100 \text{ }^\circ\text{C}, V_{suppl} = \pm 15 \text{ V}$	–	50	–	A
$I_{pmax \text{ RMS}}$	$t \leq 2 \text{ s}$	–	–	80	A
$I_{p \text{ peak}}$	$t \leq 10 \text{ } \mu\text{s}$	–	1000	–	A
$R_{out}$	terminating resistance	–	50	–	$\Omega$
$I_s \text{ RMS}$	rated sensor current at $I_p = 50 \text{ A}_{RMS}$	–	25	–	mA
$I_p : I_s$	transfer ratio	–	1 : 2000	–	
Offset <sub>error</sub>	$I_p = 0 \text{ A}, T = -40 \dots 100 \text{ }^\circ\text{C}$	–	$\pm 0,2$	–	mA
Linearity		–	0,1	–	%
delay time	$I_p =$ 10 % – 80 % 90 % – 20 %	–	< 1	–	$\mu\text{s}$
Bandwidth		–	< 1	–	$\mu\text{s}$
		–	0 – 100	(–3dB)	kHz

Temperature Sensor			
$R_{TS}$	$T = 25 / 100 \text{ }^\circ\text{C}$	1000 / 1670	$\Omega$

Mechanical Data					
$M_1$	case to heatsink, SI Units	2,5	–	3,5	Nm
Case	mechanical outline see pages B 16 – 11 and B 16 – 12		M8		

### MiniSKiiP 8 SEMIKRON integrated intelligent Power SKiiP 83 AC 06 SKiiP 83 AC 06 I <sup>3)</sup> IGBT 3-phase bridge inverter

Case M8

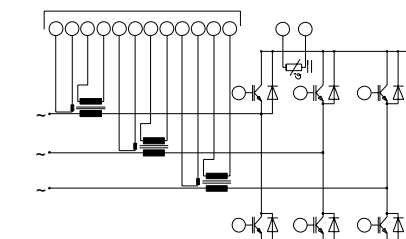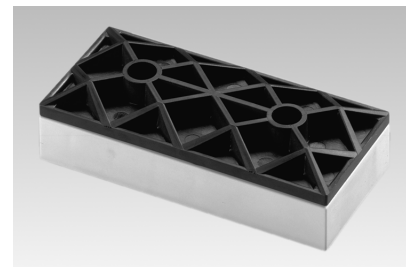

UL recognized file no. E63532

- more detailed characteristics of current sensors and temperature sensor please refer to part A
- common characteristics see page B 16 – 3

#### Options

- also available with faster IGBTs (type ... 063), data sheet on request

- <sup>1)</sup>  $T_{heatsink} = 25 \text{ }^\circ\text{C}$ , unless otherwise specified
- <sup>2)</sup> CAL = Controlled Axial Lifetime Technology (soft and fast recovery)
- <sup>3)</sup> With integrated closed loop current sensors

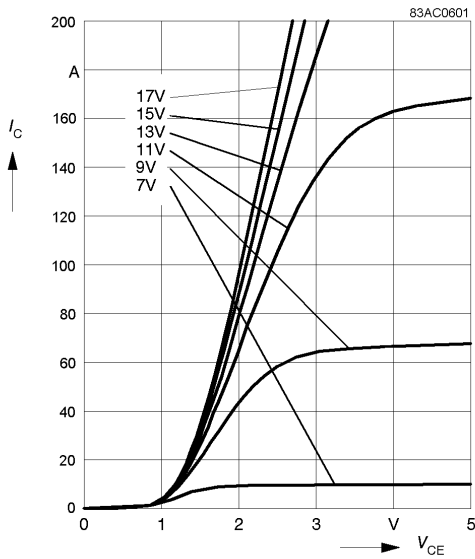


Fig. 1 Typ. output characteristic,  $t_p = 80 \mu s$ ;  $25 \text{ }^\circ\text{C}$

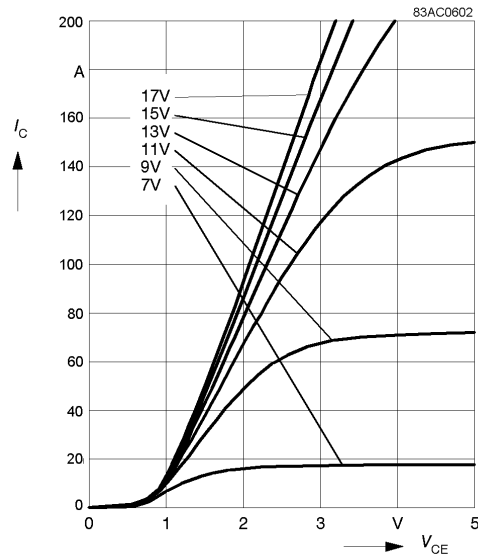


Fig. 2 Typ. output characteristic,  $t_p = 80 \mu s$ ;  $125 \text{ }^\circ\text{C}$

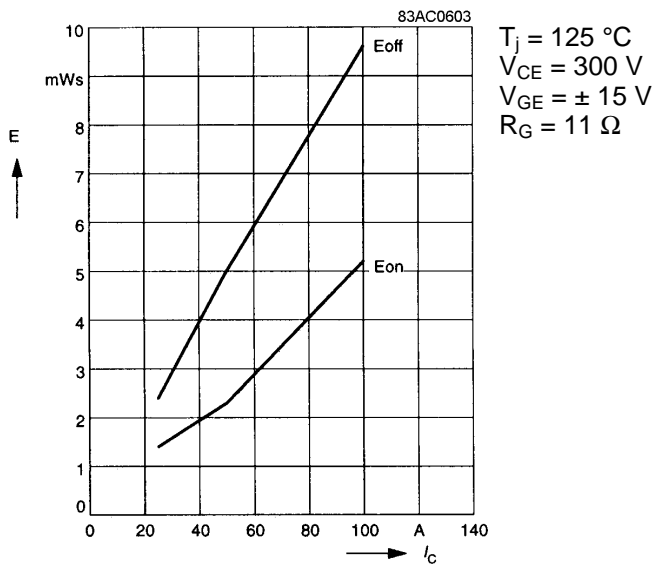


Fig. 3 Turn-on /-off energy =  $f(I_C)$

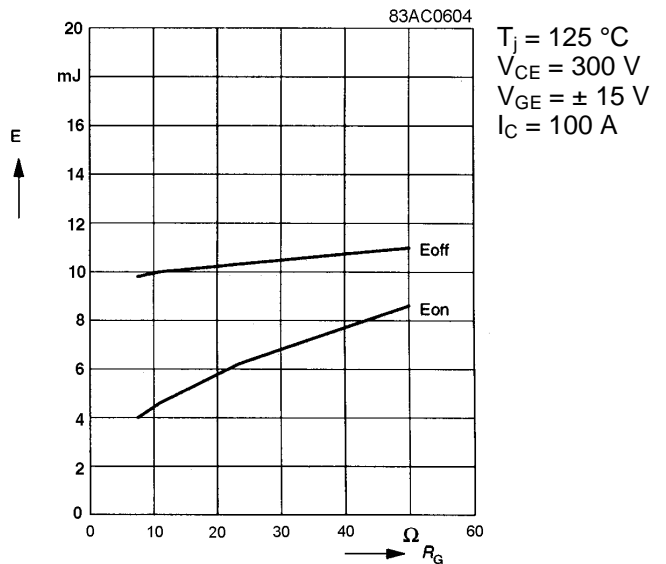


Fig. 4 Turn-on /-off energy =  $f(R_G)$

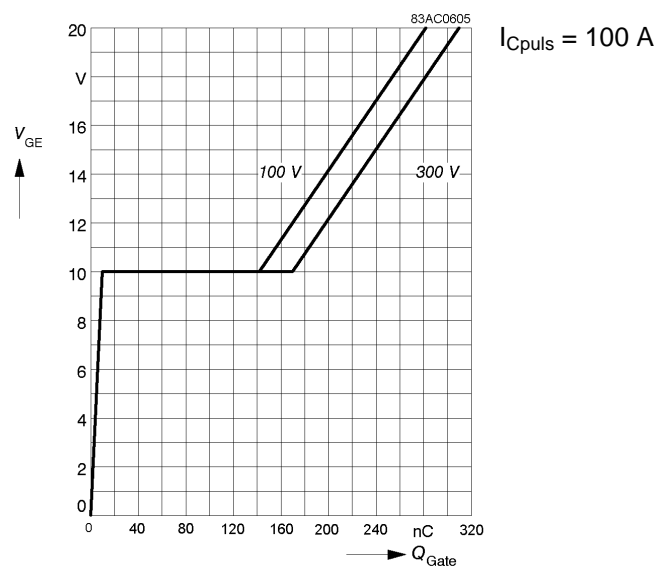


Fig. 5 Typ. gate charge characteristic

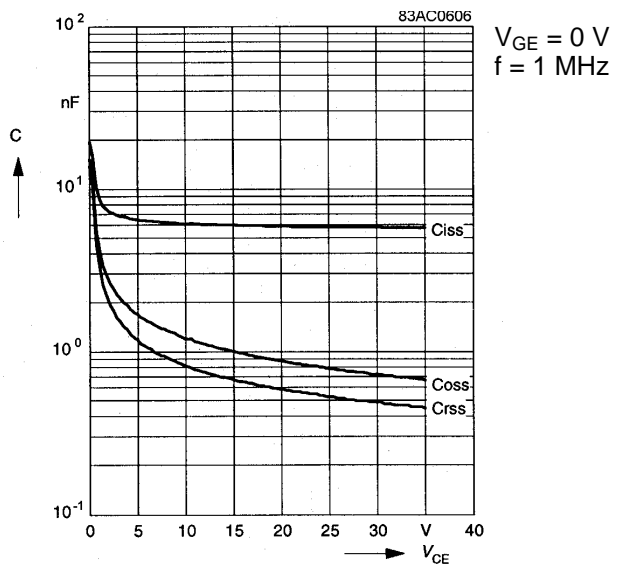


Fig. 6 Typ. capacitances vs.  $V_{CE}$

## 2. Common characteristics of MiniSKiiP

### MiniSKiiP 600 V

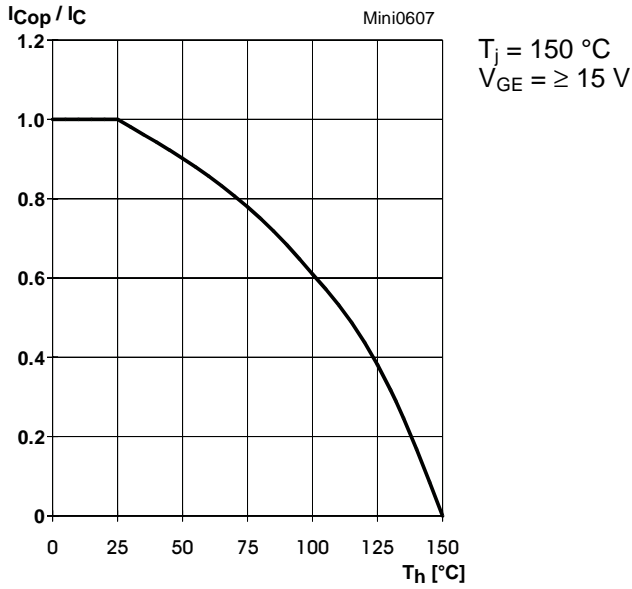


Fig. 7 Rated current of the IGBT  $I_{COP} / I_C = f(T_h)$

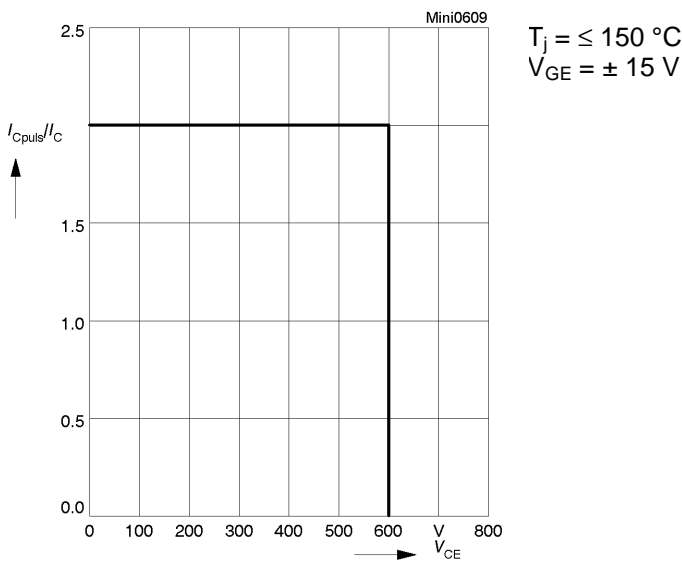


Fig. 9 Turn-off safe operating area (RBSOA) of the IGBT

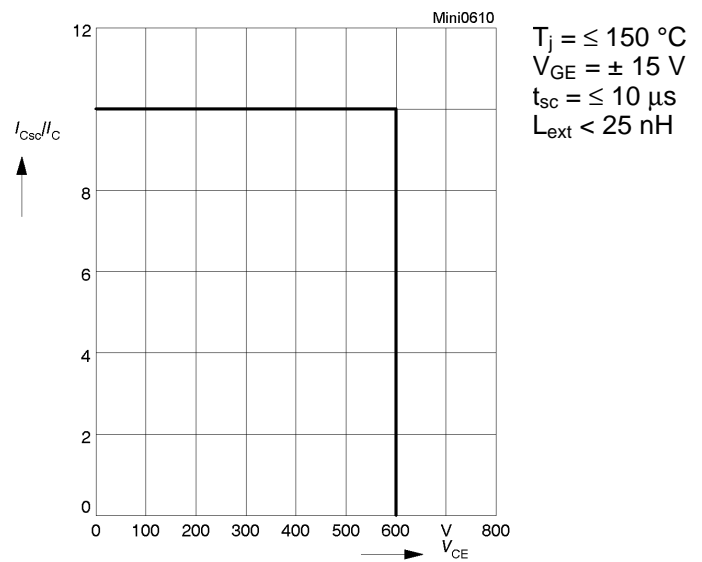


Fig. 10 Safe operating area at short circuit of the IGBT

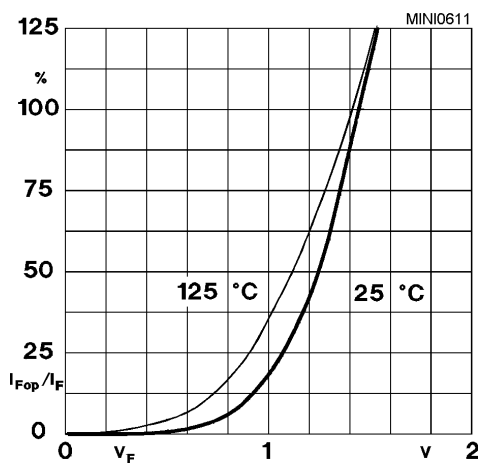


Fig. 11 Typ. freewheeling diode forward characteristic

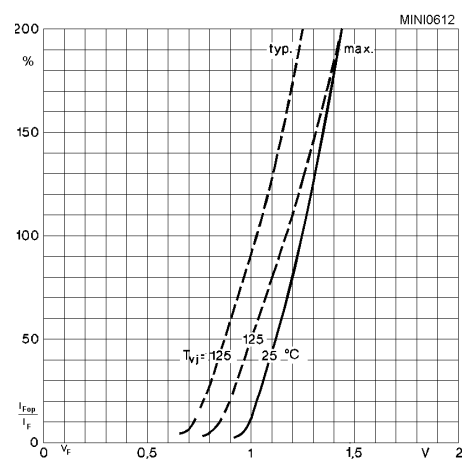


Fig. 12 Forward characteristic of the input bridge diode

### MiniSKiiP 8

Inverter part

SKiiP 82 AC 06 ...  
 SKiiP 83 AC 06 ...  
 SKiiP 81 AC 12 ...  
 SKiiP 82 AC 12 ...  
 SKiiP 83 AC 12 ...

Circuit  
 Case M8

Note: The current sensors are available only by option I

