


## M12 MALE ON TOP OF MSUD VALVE PLUG FORM BI 11MM

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.


### [Link to Product](#)


#### Illustration

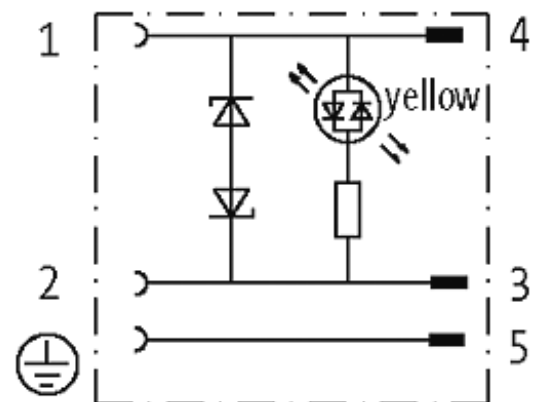

Female

Male

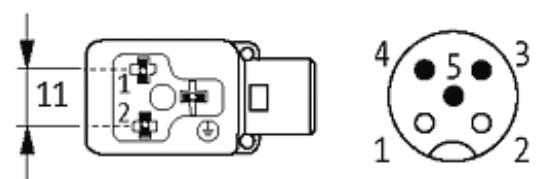

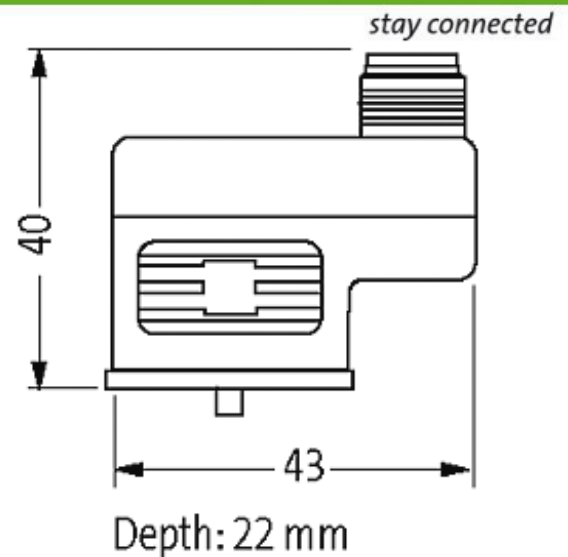

Product may differ from Image

### Approvals



### Form

42021

### Technical Data

Operating voltage	24 V AC $\pm 20\%$ / DC $\pm 25\%$
Operating current per contact	max. 4 A
Configuration	2 contacts + PE
Switch off peak	max. 55 V
Switching current	max. 15 mA
Protection	IP67 inserted and tightened (EN 60529)
Locking of ports	M3 (recommended torque 0.4 Nm)

### General data

Temperature range	-25...+85 °C
-------------------	--------------

### Commercial data

country of origin	CZ
customs tariff number	85369010
minimum order quantity	1