

# A

# 17251-DA

172x151x51mm(6.8"x5.9"x2")



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-20°C to + 70°C
INSULATION	Class B
OPERATING VOLTAGE RANGE	104 VAC to 126 VAC for 115V Type 207 VAC to 253 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1800 VAC for 1 second
INSULATION RESISTANCE	10M $\Omega$ min. @500 VDC
MOTOR TYPE	Outer Rotor, AC Induction Capacitor Motor
SAFETY	Thermally Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	1050 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP54(Special IP Rating On Request)


# 172

 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A17251V1SLB-DA	115	0.28/0.24	27/27	2800/3300	0.64/0.78	16.5/20.0	230/270	6.5/7.64	55/61
A17251V1HB-DA	115	0.25/0.23	27/27	2650/3050	0.55/0.61	14/15.5	210/250	5.94/7.07	53/59
A17251V2SLB-DA	230	0.11/0.12	24/27	2800/3300	0.64/0.78	16.5/20.0	230/270	6.5/7.64	55/61
A17251V2HB-DA	230	0.11/0.11	26/26	2650/3050	0.55/0.61	14/15.5	210/250	5.94/7.07	53/59

## DIMENSION

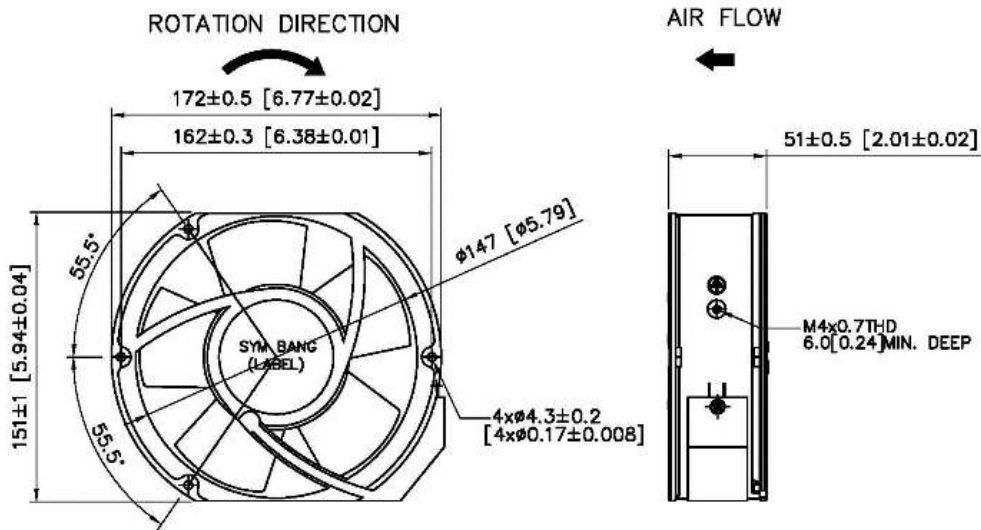

UNIT: mm[inch]

SYMBANG

## AIR PERFORMANCE

