


BOS 18KF-PA-1PE-C-02 BOS00K0



1) Optical axis 2) Output function 3) Stability 4) Sn

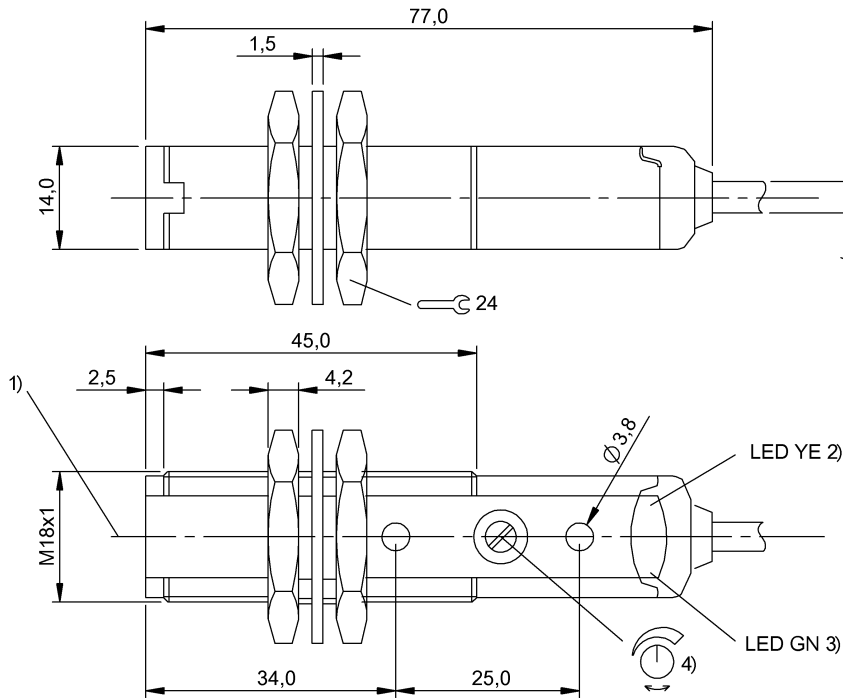

Display/Operation

Adjuster	Potentiometer 270° (1x)
Setting	Rated switching distance (Sn)

Electrical connection

Cable diameter D	4.00 mm
Cable length	2 m
Conductor cross-section	0.14 mm ²
Connection type	Cable, 2.00 m, PVC
Number of conductors	4
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

MTTF (40 °C)	639 a
No-load current I ₀ max. at U _e	35 mA
Operating voltage U _b	10...30 VDC
Rated insulation voltage U _i	75 V DC
Rated operating current I _e DC	100 mA
Rated operating voltage U _e DC	24 V
Switching frequency	1000 Hz

Turn-off delay t _{off} max.	0.5 ms
Turn-on delay t _{on} max.	0.5 ms
Voltage drop U _d max. at I _e	2 V

Environmental conditions

Ambient temperature	-25...55 °C
Protection type IEC 60529	IP67

Functional safety

Diagnostic coverage	0 %
Functional safety	no
Mission Time	10 a

General data

Approval/Conformity	CE cULus
Basic standard	IEC 60947-5-2
Series	18KF
Style	Flat cylinder Straight optics
Trademark	Global

BOS 18KF-PA-1PE-C-02 BOS00K0

Material

Housing material	PBT
Material jacket	PVC
Material sensing surface	PMMA

Mechanical data

Dimension	Ø 18 x 14 mm
Fastening detail	Screw M3 Nut M18x1
Tightening torque max.	1.5 Nm

Optical data

Ambient light max.	5000 Lux
Beam characteristic	Divergent
Light type	Infrared
Wave length	880 nm

Output/Interface

Switching output	PNP Normally closed (NC) PNP Normally open (NO)
------------------	--

Range/Distance

Measuring range	0...700 mm
Range	0...700 mm
Rated operating distance S_n	700 mm, Adjustable
Ripple max. (% of U_e)	8 %

Remarks


Reference object (target): gray card, 200 x 200, 90 % remission, axial approach.

The sensor is functional again after the overload has been eliminated. For additional information, refer to user's guide. Order accessories separately.

For further information on MTTF/B10d, please refer to the MTTF / B10d Certificate.

Specification of the MTTF value and the B10d value do not represent any binding quality and/or life expectancy guarantees.

Wiring Diagram

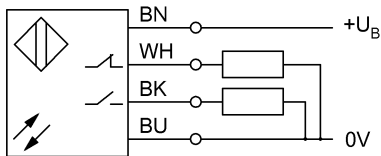

Symbols for Optoelectronic Sensors

