

# D12025 Series

120X120X25mm (4.72"X4.72"X1.26")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	150g
ROHS COMPLIANCE	Yes

## SPECIFICATION


MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D12025V12H	12	0.38	4.56	3000	0.19	4.80	88.30	2.50	48
D12025V12M	12	0.25	3.00	2500	0.15	3.80	74.50	2.11	44
D12025V12L	12	0.14	1.68	2000	0.11	2.90	61.40	1.74	38
D12025V24H	24	0.24	5.76	3000	0.19	4.80	88.30	2.50	48
D12025V24M	24	0.18	4.32	2500	0.15	3.80	74.50	2.11	44
D12025V24L	24	0.10	2.40	2000	0.11	2.90	61.40	1.74	38

## DIMENSION


## AIR PERFORMANCE

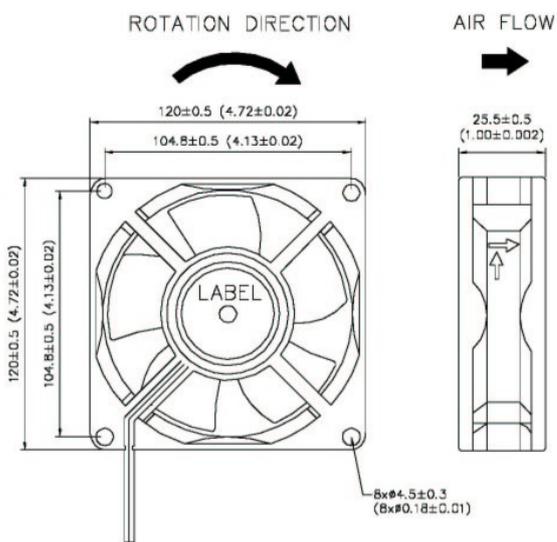

### MOUNTION PANEL CUTOUT OUTLET SIDE & INLET SIDE

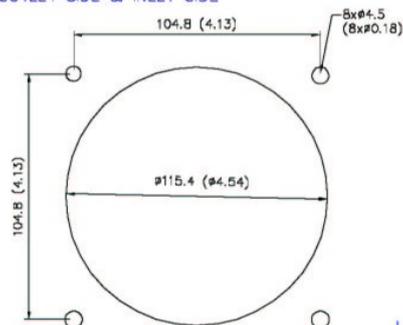

UNIT:mm(inch)

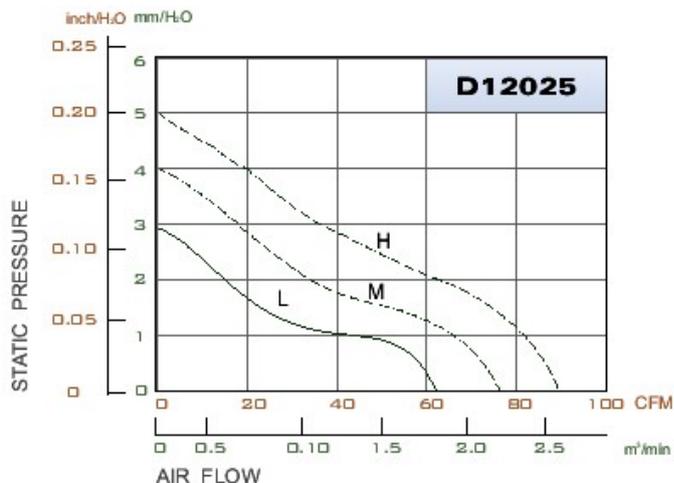

## ACTIVA INC.

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw

# D12032 Series

## 120X120X32mm (4.72"X4.72"X1.26")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0; 5 blades
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	219g
ROHS COMPLIANCE	Yes


### SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D12032V12S	12	0.83	10.00	3300	0.37	9.4	137.3	3.88	49.5
D12032V12H	12	0.67	8.04	2900	0.31	8.0	115.0	3.25	47.5
D12032V12M	12	0.45	5.40	2500	0.23	6.0	99.0	2.80	42.5
D12032V12L	12	0.33	3.96	2100	0.16	4.3	83.3	2.35	39.5
D12032V24S	24	0.80	9.60	3300	0.37	9.4	137.3	3.17	49.0
D12032V24H	24	0.29	8.40	2900	0.31	8.0	115.0	3.88	47.5
D12032V24M	24	0.20	5.52	2500	0.23	6.0	99.0	3.40	42.5
D12032V24L	24	0.15	3.60	2100	0.16	4.3	83.3	2.80	39.5
D12032V48H	48	0.19	10.00	2900	0.35	9.12	115.0	3.25	47.5
D12032V48M	48	0.13	6.24	2500	0.24	6.24	99.0	2.69	42.5
D12032V48L	48	0.09	4.32	2100	0.17	4.32	83.3	2.80	39.5

### DIMENSION

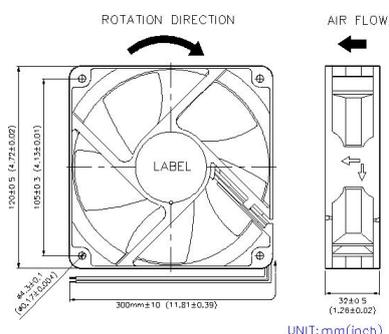

### AIR PERFORMANCE

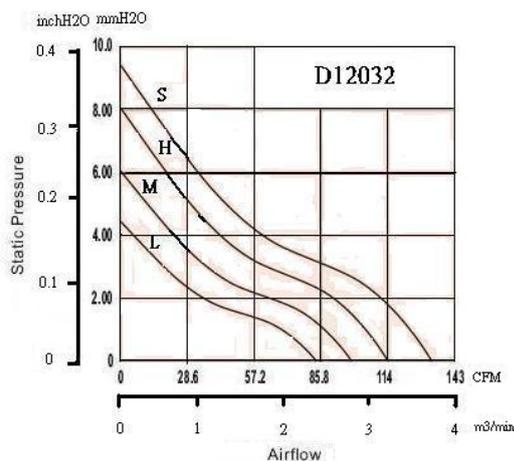

## ACTIVA INC.

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Die - Cast Aluminum Housing, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	420g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D12038V12H	12	0.32	3.84	3000	0.23	5.85	85	2.41	48
D12038V12M	12	0.22	2.64	2500	0.15	3.89	66.83	2.01	40
D12038V24H	24	0.18	4.32	3000	0.23	5.85	85	2.41	48
D12038V24M	24	0.14	3.36	2500	0.15	3.89	66.83	2.01	40
D12038V48H	48	0.13	6.24	3000	0.23	5.85	85	2.41	48
D12038V48M	48	0.12	5.76	2500	0.15	3.89	66.83	2.01	40

**DIMENSION**

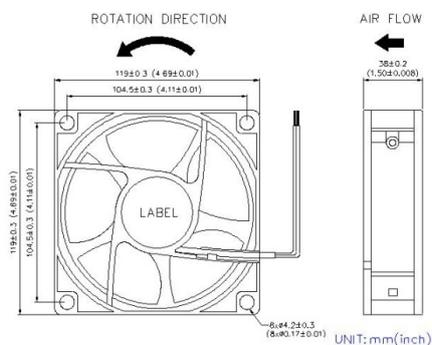

**AIR PERFORMANCE**

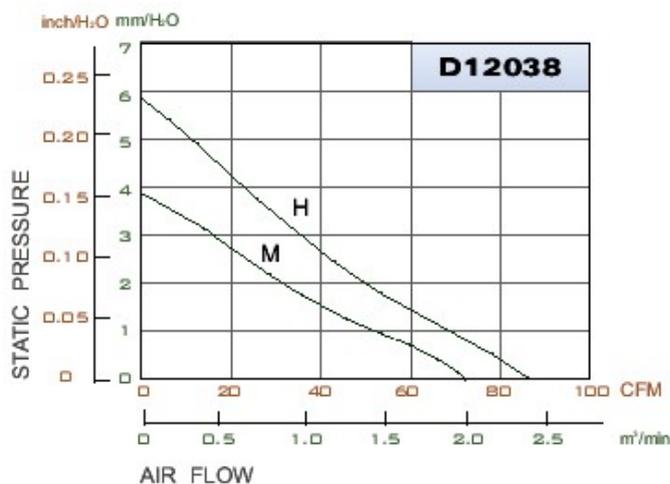

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Die - Cast Aluminum Housing, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	420g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D12038V12SH-03	12	1.80	21.6	3400	0.43	10.81	168	4.76	50
D12038V12H-03	12	1.10	13.20	2900	0.29	7.30	145	4.11	48
D12038V12M-03	12	1.00	12.00	2400	0.22	5.60	121	3.43	46
D12038V24H-03	24	0.80	19.20	2900	0.29	7.30	145	4.11	48
D12038V24M-03	24	0.60	14.40	2400	0.22	5.60	121	3.43	46
D12038V48H-03	48	0.40	19.20	2900	0.29	7.30	145	4.11	48
D12038V48M-03	48	0.18	8.64	2400	0.22	5.60	121	3.43	46

**DIMENSION**

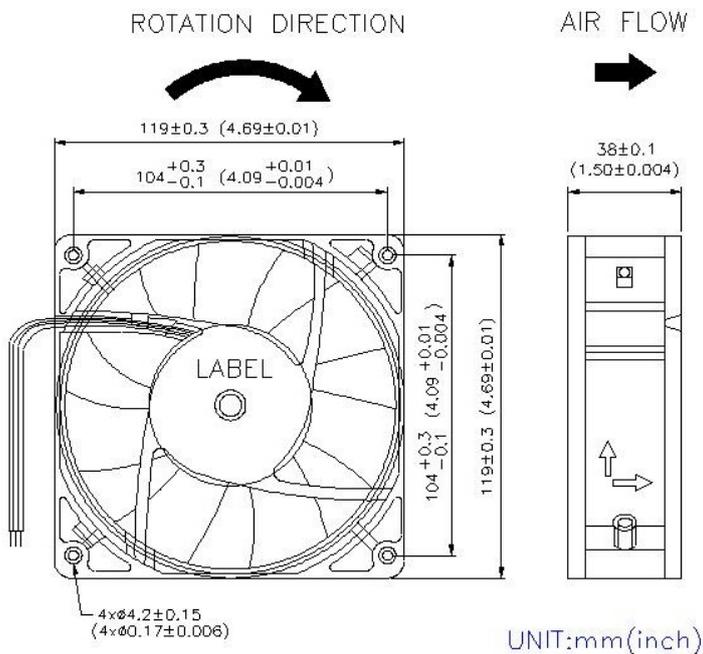

**AIR PERFORMANCE**

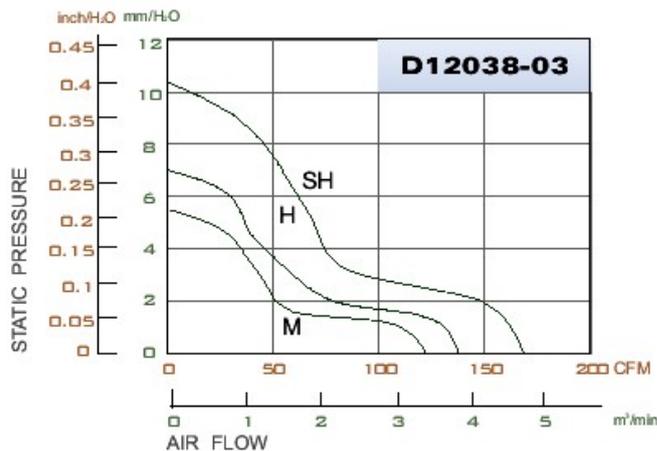




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0 (11 Blades),(Double Impeller)
BEARING	Ball
OPERATING TEMPERATURE	-10 °C to +70 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute(Between Frame and Terminal)
WEIGHT	330g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D12038V12H-K	12	2.00	24.00	4000	0.70	17.78	190.00	5.381	59
D12038V12M-K	12	1.50	18.00	3600	0.56	14.30	170.92	4.841	59
D12038V12L-K	12	1.00	12.00	3200	0.44	11.30	151.85	4.300	59
D12038V24H-K	24	1.50	36.00	4000	0.70	17.78	190.00	5.381	59
D12038V24M-K	24	0.80	19.20	3600	0.56	14.30	170.92	4.841	59
D12038V24L-K	24	0.56	13.44	3200	0.44	11.30	151.85	4.300	59
D12038V48H-K	48	1.00	48.00	4000	0.70	17.78	190.00	5.381	59
D12038V48M-K	48	0.38	18.24	3600	0.56	14.30	170.92	4.841	59
D12038V48L-K	48	0.28	13.44	3200	0.44	11.30	151.85	4.300	59

**DIMENSION**

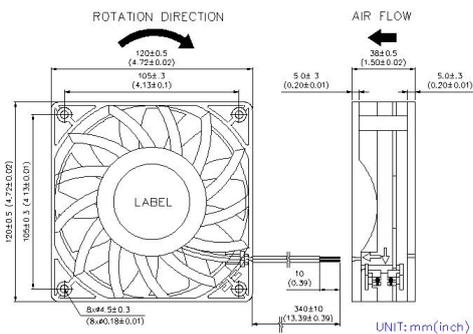

**AIR PERFORMANCE**

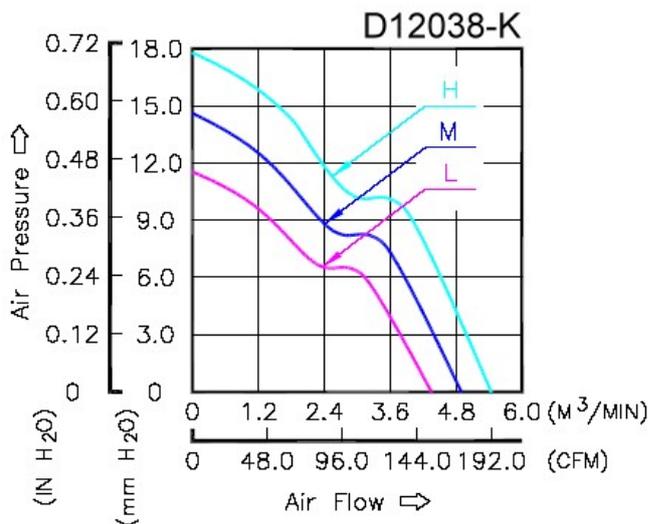

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve Bearing
OPERATING TEMPERATURE	-10 °C to +60 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	1.3g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D1504V3HS	3.0	0.05	0.15	8500	0.016	0.4	0.15	0.004	20

**DIMENSION**

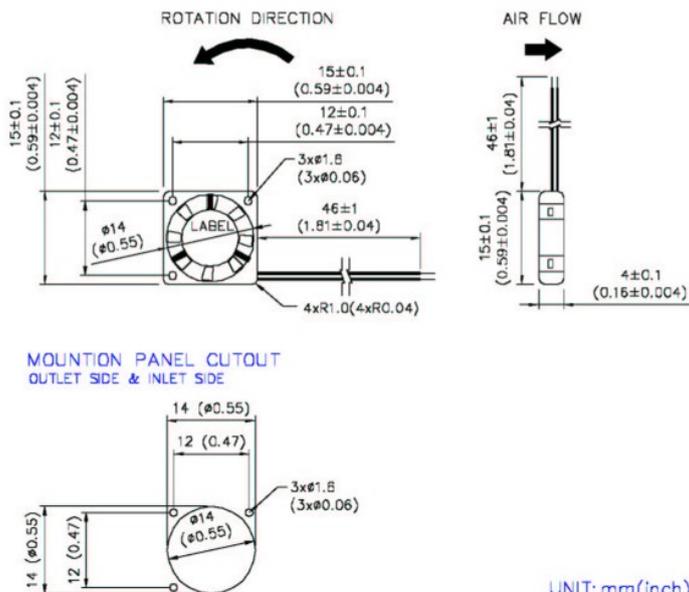

**AIR PERFORMANCE**

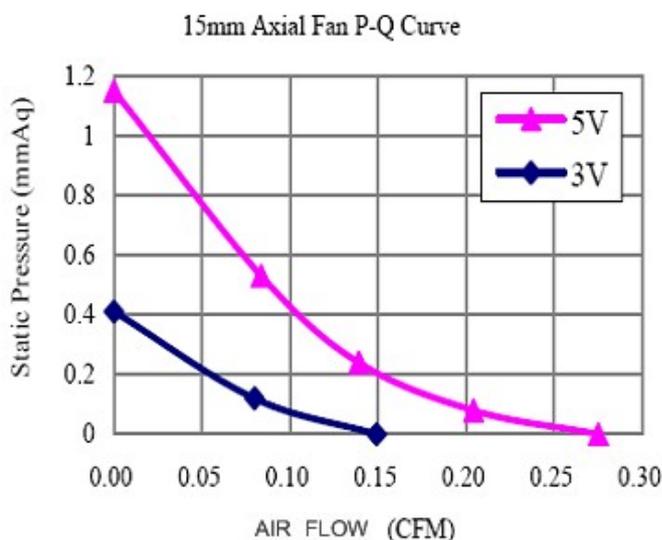

# D17225 Series

172X150X25.4mm (6.77"X5.9"X1")


HOUSING	Thermoplastic PBT,UL94V-0
IMPELLER	Thermoplastic PBT,UL94V-0;7 blades
BEARING	Ball
OPERATING TEMPERATURE	-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC(Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute(Between Frame and Terminal)
WEIGHT	450g
ROHS COMPLIANCE	Yes




**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D17225V48SH	48	0.58	27.84	4000	0.800	20.30	263.21	7.453	61.3
D17225V48SM	48	0.43	20.64	3700	0.669	17.00	238.73	6.760	59.6
D17225V48SL	48	0.35	16.80	3400	0.571	14.50	218.01	6.173	57.0
D17225V48H	48	0.29	13.92	3200	0.516	13.10	210.20	5.952	54.9
D17225V48M	48	0.23	11.04	3000	0.464	11.78	195.07	5.524	53.0
D17225V48L	48	0.19	9.12	2700	0.377	9.57	172.13	4.874	50.7
D17225V48XL	48	0.14	6.72	2400	0.287	7.28	151.84	4.300	47.1

**DIMENSION**

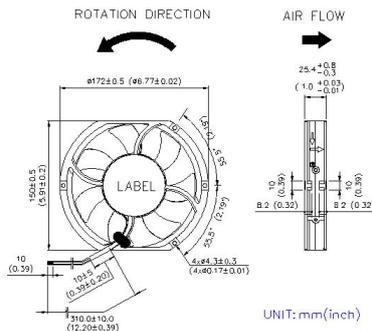

**AIR PERFORMANCE**

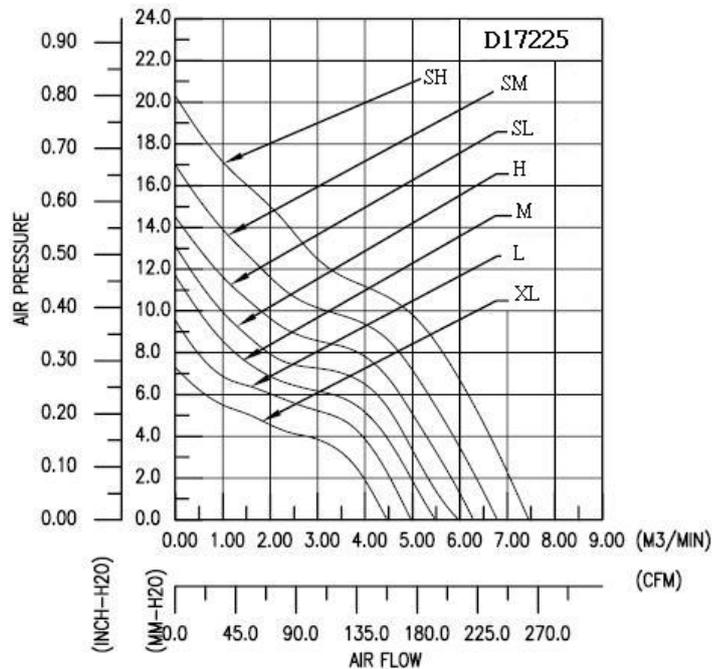

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw

# D17251 Series

172X151X51mm (6.77"X5.94"X2" )




HOUSING	Die - Cast Aluminum, Painted Black
IMPELLER	Thermoplastic PBT, UL94V - 0
BEARING	Ball
OPERATING TEMPERATURE	-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	792g
ROHS COMPLIANCE	Yes


## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D17251V12H	12	1.90	23	3400	20.07	0.79	228	6.46	56
D17251V12M	12	1.40	16.80	3000	0.62	15.75	203	5.75	52
D17251V12L	12	0.85	10.20	2600	0.47	11.94	175	4.96	48
D17251V12XL	12	0.60	7.20	2200	149	0.36	149	4.22	43
D17251V24H	24	0.87	21	3400	0.80	20.07	228	6.46	56
D17251V24M	24	0.65	16	3000	0.62	15.75	203	5.75	52
D17251V24L	24	0.44	10.50	2600	0.47	11.94	175	4.96	48
D17251V24XL	24	0.30	7.40	2200	0.36	9.14	149	4.22	43
D17251V48H	48	0.50	24	3400	0.79	20.07	228	6.46	56
D17251V48M	48	0.35	17	3000	0.62	15.75	203	5.75	52

## DIMENSION

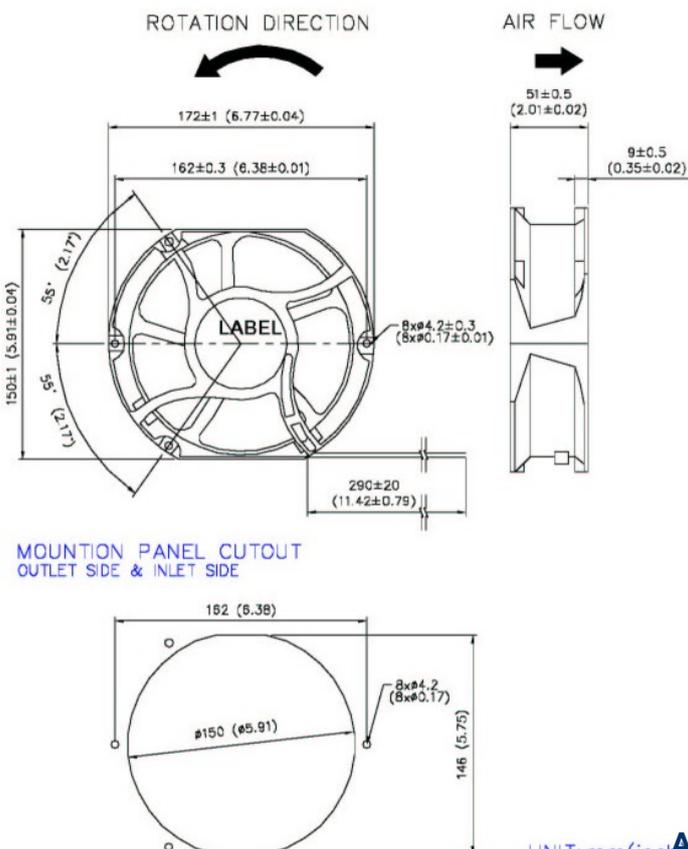

## AIR PERFORMANCE

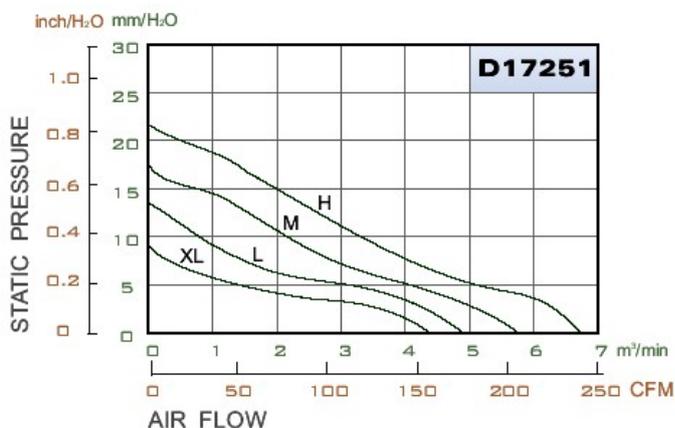

UNIT: mm(inch) **ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
TEL:886-7-2824356 FAX:886-7-2414287  
Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve Bearing
OPERATING TEMPERATURE	-10 °C to +60 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	1.5
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D1804V3HS	3.0	0.055	0.165	8000	0.029	0.75	0.45	0.013	20

**DIMENSION**

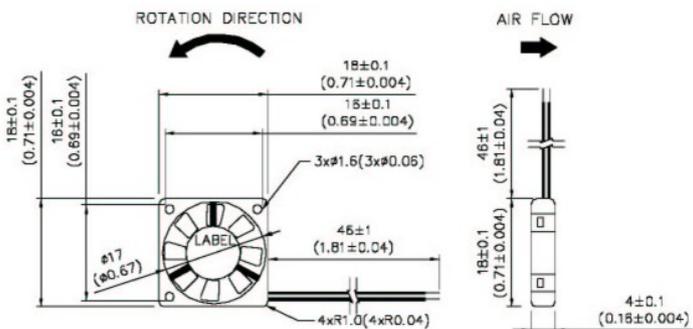


MOUNTION PANEL CUTOUT  
OUTLET SIDE & INLET SIDE (SCALE=0.75)

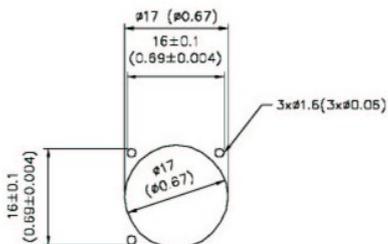

UNIT:mm(inch)

**AIR PERFORMANCE**

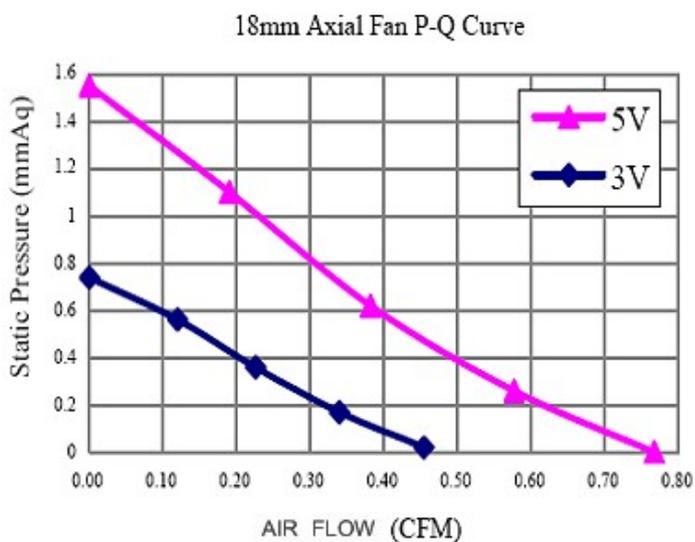

**ACTIVA INC.**





HOUSING	Die - Cast Aluminum, Painted Black
IMPELLER	Thermoplastic PBT, UL94V - 0
BEARING	Ball
OPERATING TEMPERATURE	-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	1.75Kg
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D20070V24H	24	4.0	96	4540	2.35	59.69	576	16.3	65
D20070V48H	48	2.1	97	4540	2.35	59.69	576	16.3	65

**DIMENSION**

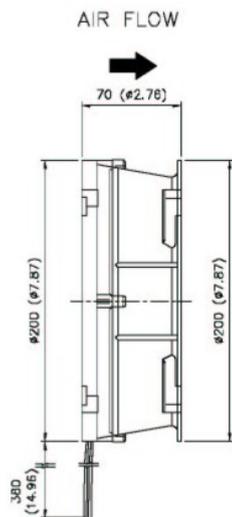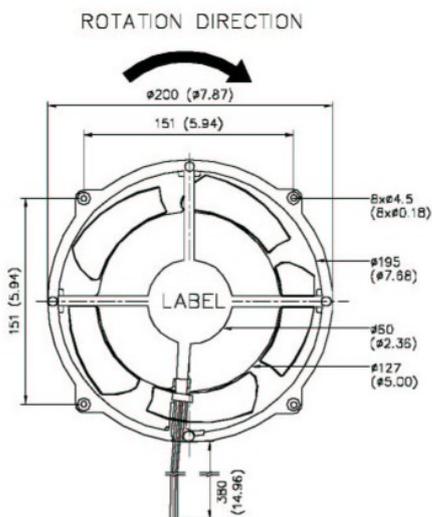


MOUNTION PANEL CUTOUT  
OUTLET SIDE & INLET SIDE

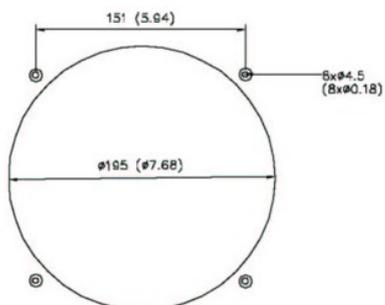

UNIT: mm(inch)

**AIR PERFORMANCE**

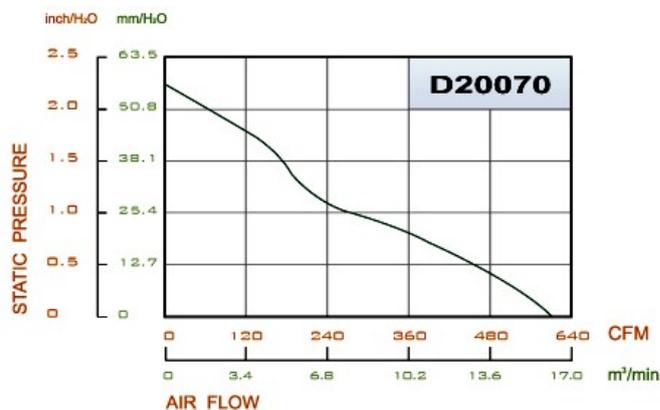




HOUSING	Die - Cast Aluminum, Painted Black
IMPELLER	Thermoplastic PBT, UL94V - 0
BEARING	Ball
OPERATING TEMPERATURE	-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	1.8Kg
ROHS COMPLIANCE	Yes


### SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D25089V24H	24	1.27	30.75	2075	13.35	0.53	720	16.24	49
D25089V48H	48	0.68	32	2050	15.3	0.60	775	21.93	51

### DIMENSION

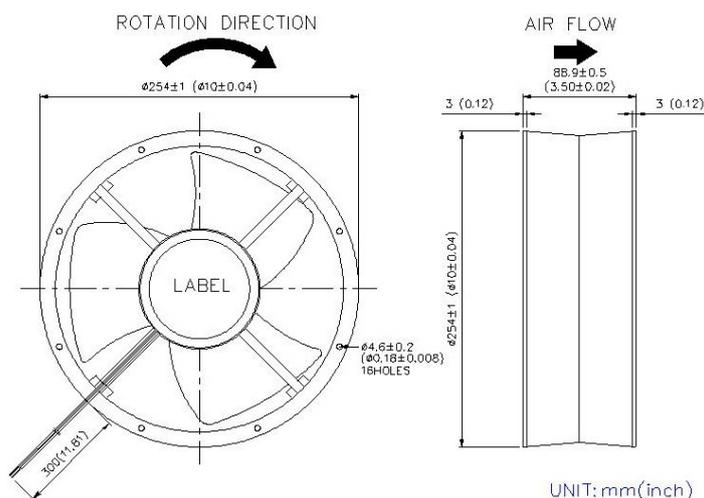

### AIR PERFORMANCE

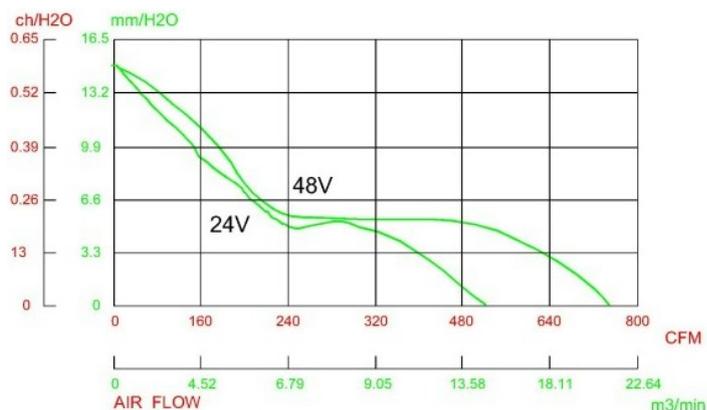

## ACTIVA INC.

# D2510 Series

25X25X10mm(1.0"X1.0"X0.48")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	8g
ROHS COMPLIANCE	Yes

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D2510V5S	5	0.14	0.70	12000	0.21	5.2	2.4	0.06	24
D2510V5H	5	0.10	0.50	10000	0.14	3.8	2.1	0.05	22
D2510V5M	5	0.08	0.40	8500	0.08	2.1	1.6	0.04	18
D2510V5L	5	0.05	0.50	7000	0.06	2.1	1.4	0.03	16
D2510V12S	12	0.09	0.45	12000	0.21	5.2	2.4	0.06	24
D2510V12H	12	0.06	0.30	10000	0.14	3.8	2.1	0.05	22
D2510V12M	12	0.05	0.25	8500	0.08	2.1	1.6	0.04	18
D2510V12L	12	0.05	0.25	7000	0.06	1.6	1.4	0.03	16

## DIMENSION

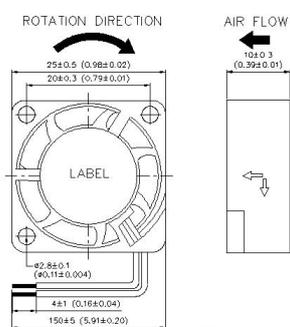

## AIR PERFORMANCE



## ACTIVA INC.

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Thermoplastic PBT,UL94V-0
IMPELLER	Thermoplastic PBT,UL94V-0;11 blades
BEARING	Ball
OPERATING TEMPERATURE	-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min.@500 VDC(Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute(Between Frame and Terminal)
WEIGHT	6g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D3006V12H	12	0.12	1.4	10000	0.14	3.58	3.87	0.10	27.31
D3006V12M	12	0.10	1.2	8000	0.08	2.15	2.32	0.06	20.92
D3006V5H	5	0.20	1.0	8000	0.14	3.58	3.87	0.10	27.31
D3006V5M	5	0.12	0.6	6000	0.08	2.15	2.32	0.06	20.92

**DIMENSION**

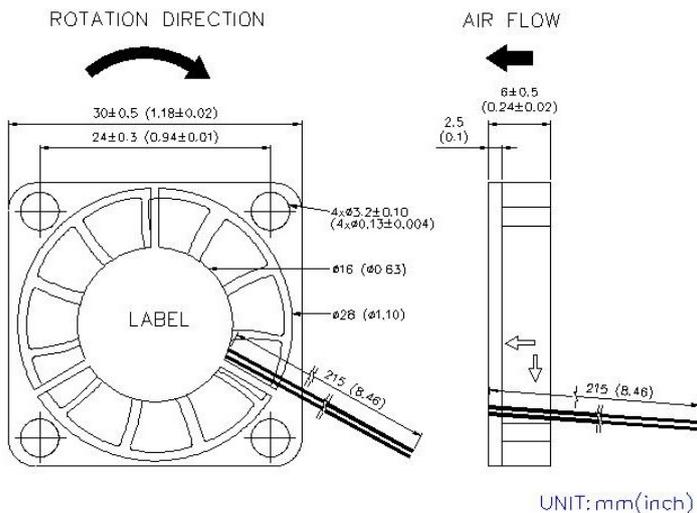

**AIR PERFORMANCE**

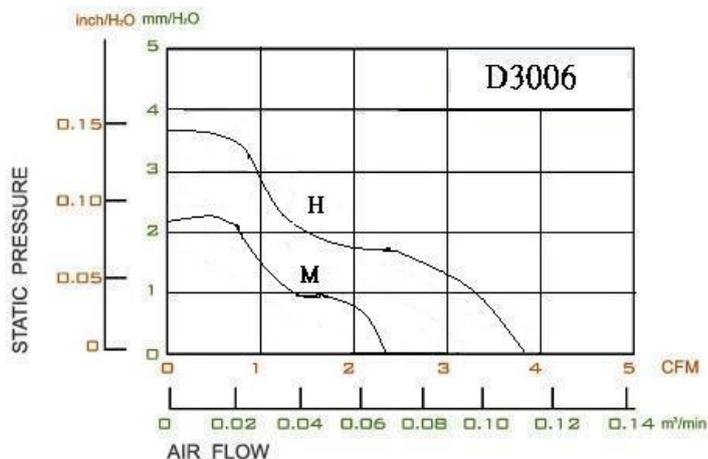

**ACTIVA INC.**




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	9g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D3010V5S	5	0.16	0.80	10000	0.17	4.5	4.3	0.12	31
D3010V5H	5	0.10	0.50	7800	0.12	3.3	3.3	0.09	25
D3010V5M	5	0.08	0.40	6800	0.10	2.6	2.9	0.08	23
D3010V5L	5	0.06	0.30	5800	0.07	2.0	2.6	0.07	19
D3010V12H	12	0.09	0.45	7800	0.12	3.3	3.3	0.09	25
D3010V12M	12	0.07	0.35	6800	0.10	2.6	2.9	0.08	23
D3010V12L	12	0.05	0.25	5800	0.07	2.0	2.6	0.07	19

**DIMENSION**

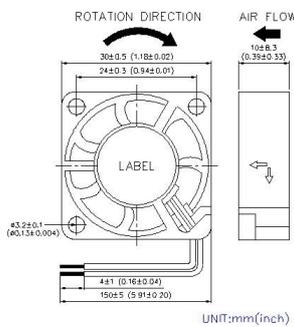

**AIR PERFORMANCE**

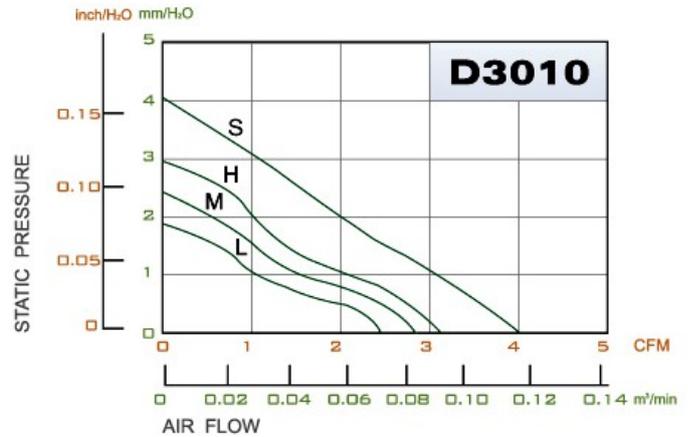

# D4007 Series

40X40X7mm (1.57"X1.57"X0.28")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	8g
ROHS COMPLIANCE	Yes


## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D4007V5H	5	0.15	0.75	6500	0.08	2.70	6.70	0.17	28
D4007V5M	5	0.12	0.60	5500	0.05	1.14	4.16	0.12	22
D4007V12H	12	0.15	1.80	7500	0.09	2.79	6.91	0.17	29

## DIMENSION

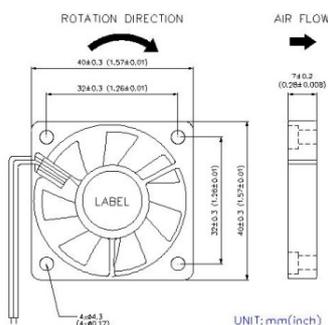

## AIR PERFORMANCE

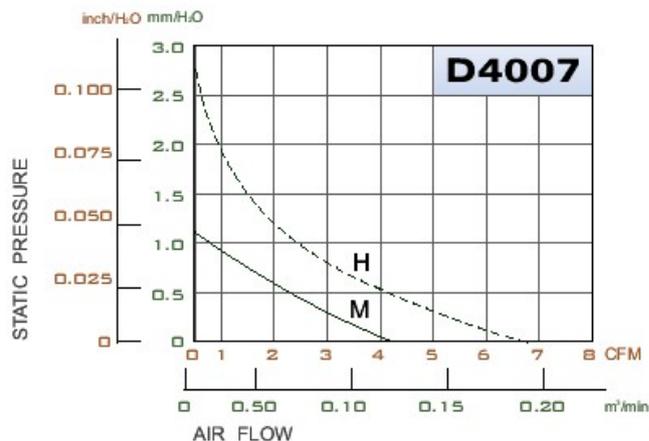

## ACTIVA INC.




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	18g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D4010V5H	5	0.23	1.15	6500	0.09	2.40	7.70	0.22	29
D4010V5M	5	0.18	0.90	5000	0.07	1.87	6.48	0.18	24.5
D4010V12H	12	0.13	1.56	6500	0.09	2.40	7.70	0.22	29
D4010V12M	12	0.09	1.08	5000	0.07	1.87	6.48	0.18	24.5
D4010V24H	24	0.13	1.56	5500	0.07	1.95	7.00	0.19	28

**DIMENSION**

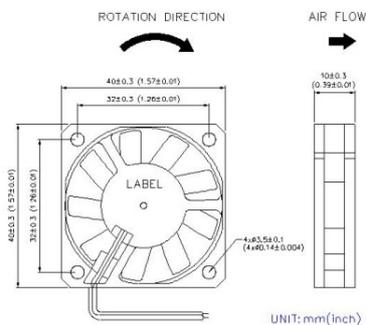

**AIR PERFORMANCE**

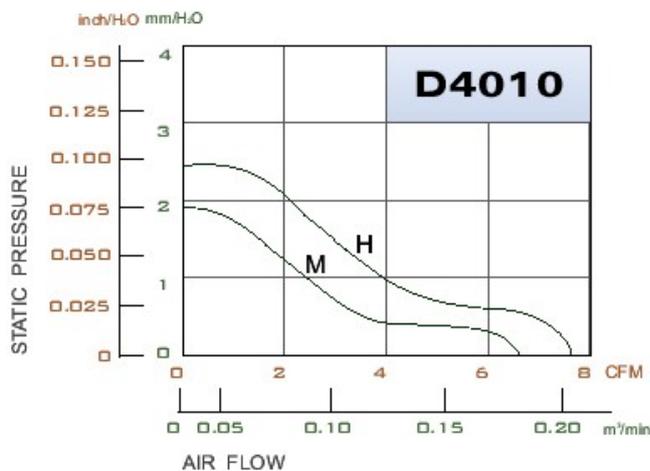

**ACTIVA INC.**

# D4015-Y seires

40x40x15mm (1.57"x1.57"x0.59")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	26g
ROHS COMPLIANCE	Yes


## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D4015V12H	12	0.12	1.44	8600	0.34	8.7	9.5	0.26	36.5
D4015V12M	12	0.1	1.20	7300	0.26	6.8	7.5	0.21	32.0
D4015V12L	12	0.08	0.96	6000	0.18	4.6	6.1	0.17	28.0

## DIMENSION

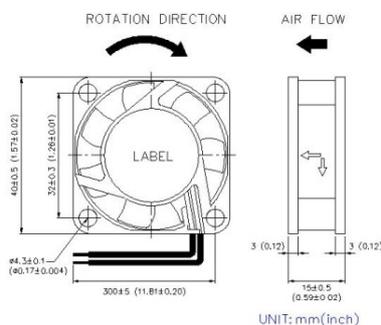

## AIR PERFORMANCE

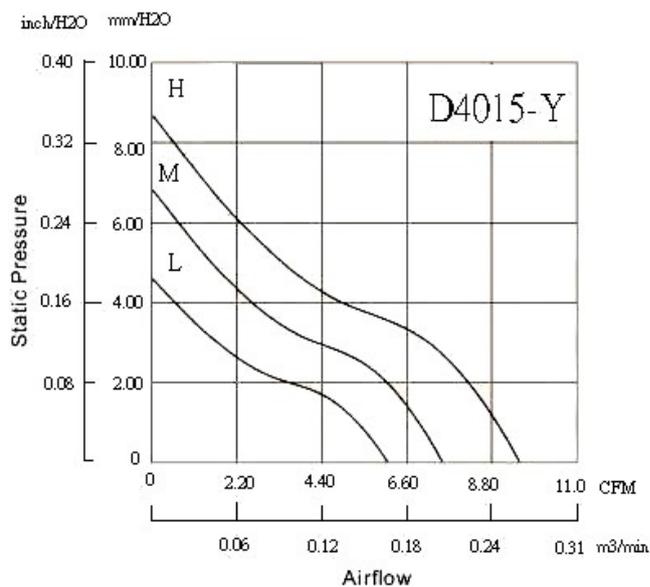

## ACTIVA INC.

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw

# D4020 Series

40X40X20mm(1.57"X1.57"X0.79")





HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	40g
ROHS COMPLIANCE	Yes

**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D4020V5H	5	0.25	1.25	7000	0.15	3.80	7.77	0.22	31
D4020V5M	5	0.12	0.60	6000	0.08	2.00	5.00	0.14	26
D4020V12H	12	0.16	1.92	7000	0.21	5.31	8.53	0.24	31
D4020V12M	12	0.10	1.20	6000	0.15	3.91	7.09	0.20	26
D4020V12L	12	0.08	0.96	5000	0.11	2.80	6.00	0.17	22
D4020V24H	24	0.18	4.32	7000	0.21	5.31	8.53	0.24	31
D4020V24M	24	0.13	3.12	6000	0.15	3.91	7.09	0.20	26
D4020V24L	24	0.10	2.40	5000	0.11	2.80	6.00	0.17	22

**DIMENSION**

**AIR PERFORMANCE**

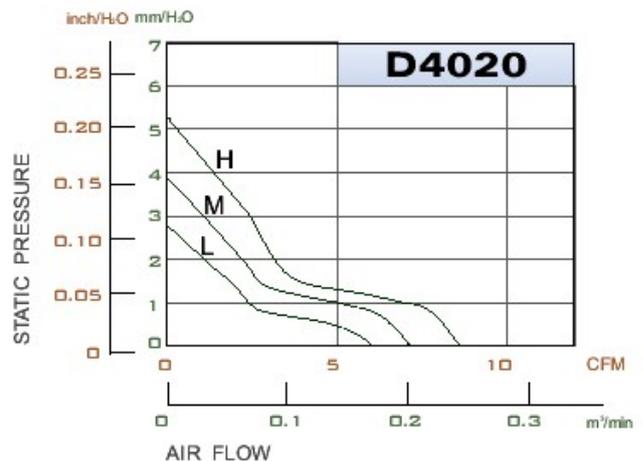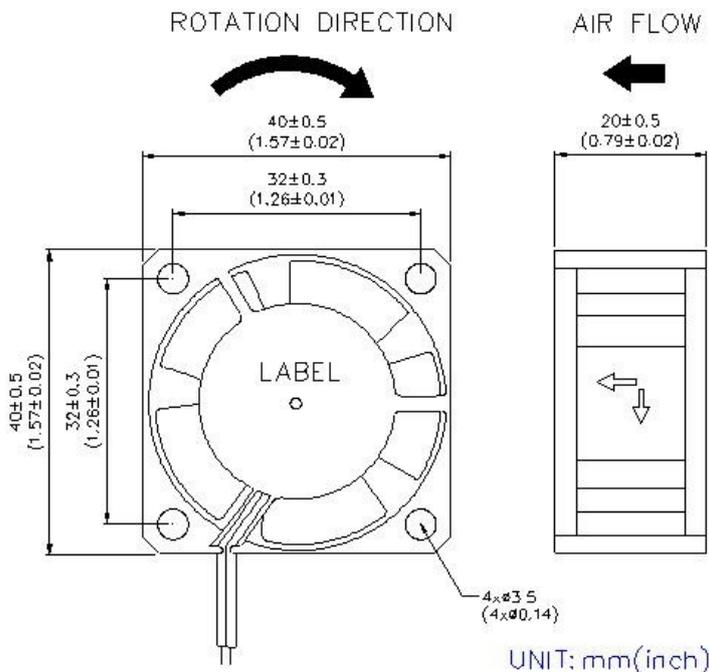

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw

# D4028 Series

## 40X40X28mm (1.57"X1.57"X1.1")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0;5 Blades
BEARING	Ball
OPERATING TEMPERATURE	-10 °C to +70 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	40g(1.41OZ)
ROHS COMPLIANCE	Yes


### SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D4028V12S	12	0.64	7.68	15000	1.638	41.61	24.82	0.703	58.0
D4028V12H	12	0.55	6.60	13000	1.324	33.65	23.78	0.673	54.0
D4028V12M	12	0.38	4.56	11000	0.920	23.38	18.73	0.542	48.6
D4028V12L	12	0.37	4.44	9500	0.692	17.57	15.85	0.449	42.0
D4028V12XL	12	0.14	1.68	8000	0.456	11.60	13.86	0.401	40.0
D4028V24H	24	0.28	6.72	13000	1.324	33.65	23.78	0.673	54.0
D4028V24M	24	0.18	4.32	11000	0.920	23.38	18.73	0.542	48.6
D4028V24L	24	0.12	2.88	9500	0.692	17.57	15.85	0.449	42.0
D4028V24XL	24	0.10	2.40	8000	0.456	11.60	13.86	0.401	40.0

### DIMENSION

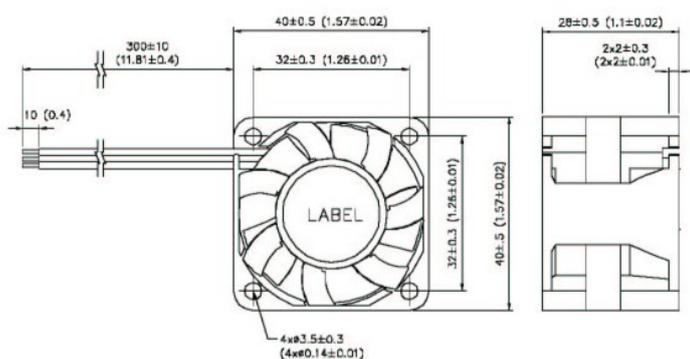


### MOUNTING PANEL CUTOUT OUTLET SIDE & INLET SIDE

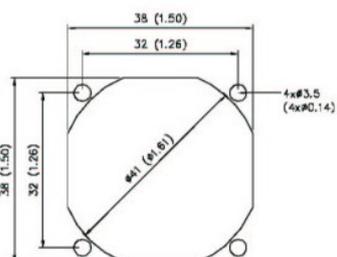

UNIT:mm(inch)

### AIR PERFORMANCE

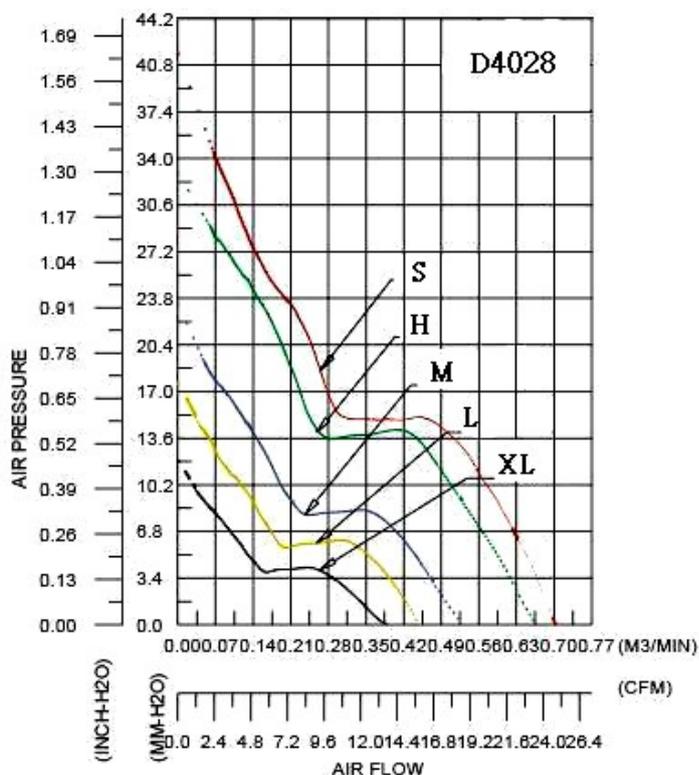

## ACTIVA INC.

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
TEL:886-7-2824356 FAX:886-7-2414287  
Website:www.activa.com.tw Email:symbang@seed.net.tw

# D4056 series

40X40X56mm (1.57"X1.57"X2.20")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0;5 Blades
BEARING	Ball
OPERATING TEMPERATURE	-10 °C to +70 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	96g(3.09OZ)
ROHS COMPLIANCE	Yes



**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D4056V12S	12	1.25	15.00	13900	2.028	51.51	29.83	0.845	61.5
D4056V12H	12	1.00	12.00	13300	1.815	46.11	28.42	0.805	61.0
D4056V12M	12	0.85	10.20	11000	1.496	38.01	26.05	0.738	58.0


**DIMENSION**

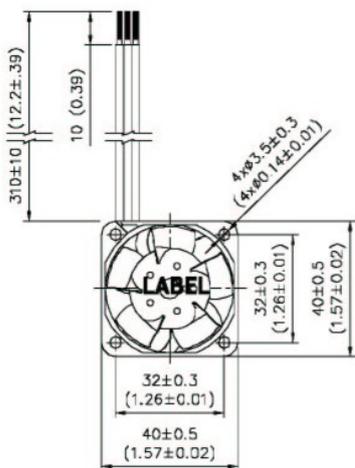

MOUNTION PANEL CUTOUT  
OUTLET SIDE & INLET SIDE

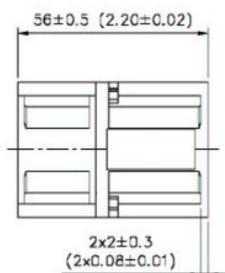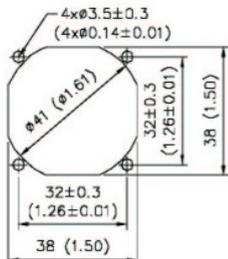

**AIR PERFORMANCE**

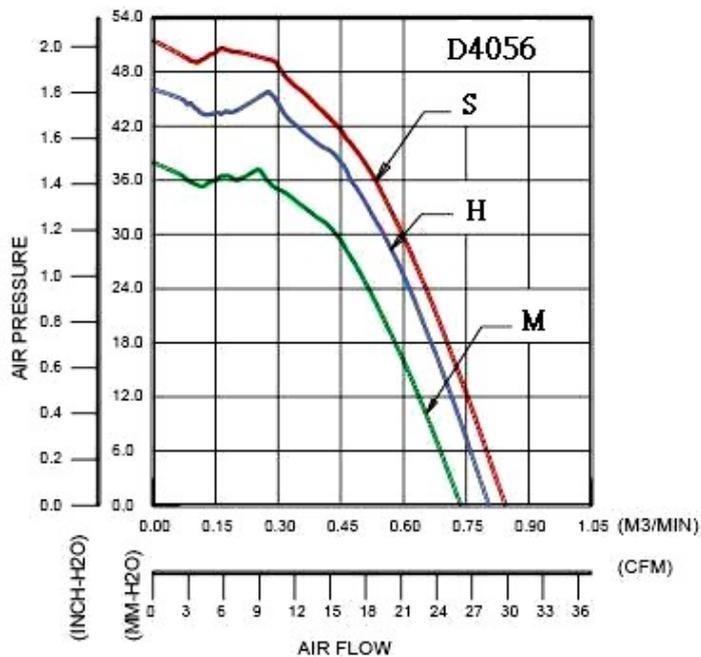

UNIT: mm(inch)

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
TEL:886-7-2824356 FAX:886-7-2414287  
Website:www.activa.com.tw Email:symbang@seed.net.tw

# D5010 Series

50X50X10mm(1.97"X1.97"X0.39")

HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	20g
ROHS COMPLIANCE	Yes




**SPECIFICATION**


MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D5010V12H	12	0.16	1.92	5500	0.10	2.54	12.21	0.35	32
D5010V12M	12	0.10	1.20	4000	0.06	1.46	8.79	0.25	29
D5010V12L	12	0.07	0.84	3500	0.05	1.20	7.49	0.21	20

**DIMENSION**


**AIR PERFORMANCE**

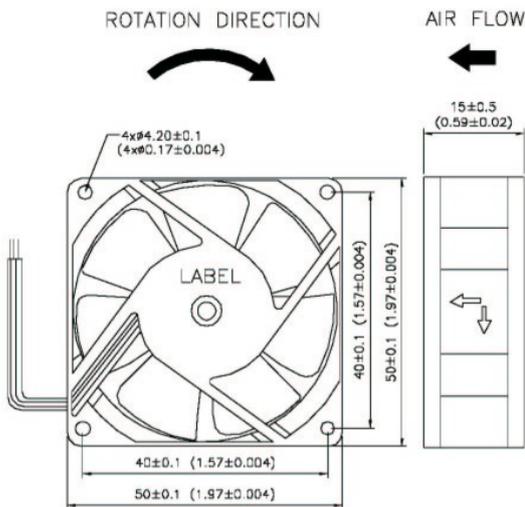

MOUNTING PANEL CUTOUT  
OUTLET SIDE & INLET SIDE

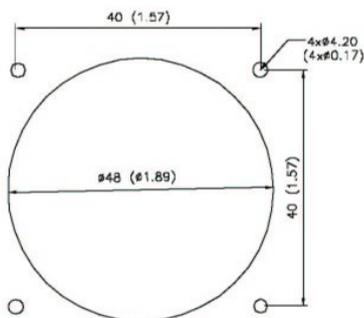

UNIT:mm(inch)

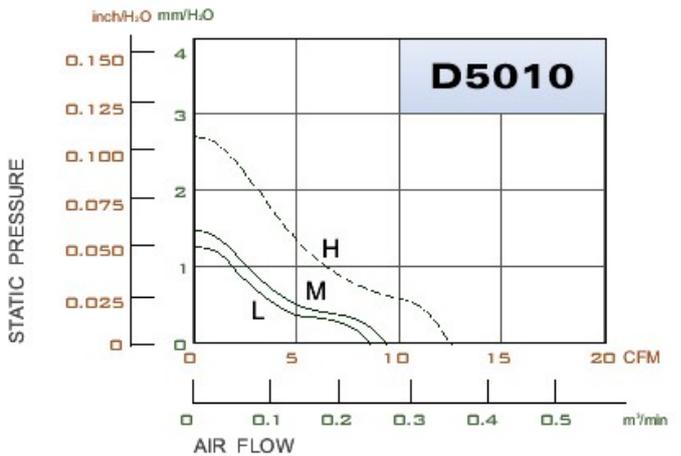

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
TEL:886-7-2824356 FAX:886-7-2414287  
Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	30g
ROHS COMPLIANCE	Yes

**SPECIFICATION**


MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D5015V12H	12	0.19	2.28	6300	0.23	5.93	17.22	0.49	38
D5015V12M	12	0.15	1.80	5600	0.20	5.16	15.75	0.45	35

**DIMENSION**

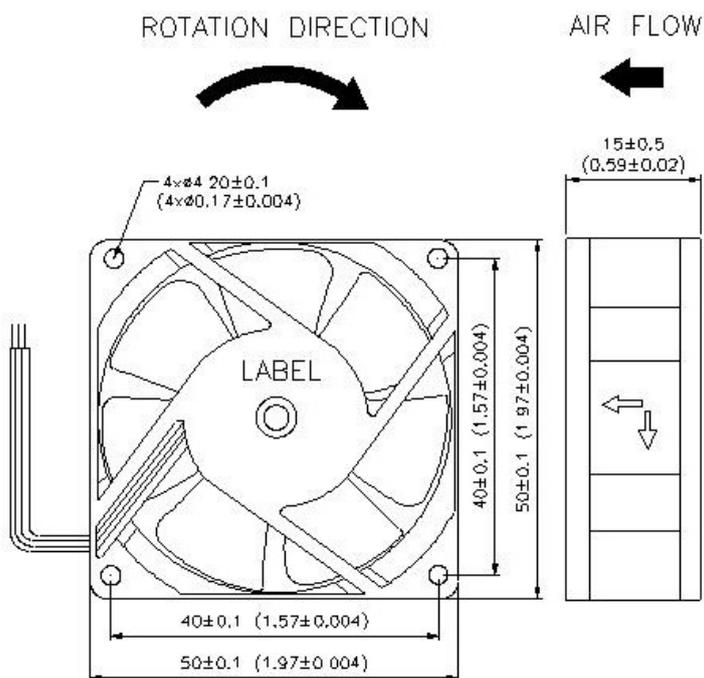

UNIT:mm(inch)

**AIR PERFORMANCE**

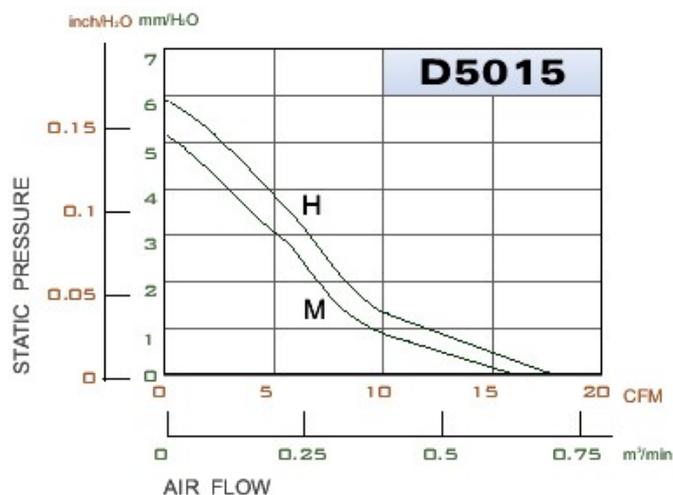

**ACTIVA INC.**

# D6010 Series

## 60X60X10mm (2.36"X2.36"X0.39")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	30g
ROHS COMPLIANCE	Yes


### SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D6010V12H	12	0.21	2.52	4700	0.13	3.30	23.30	0.66	36.8
D6010V12M	12	0.16	1.92	4200	0.11	2.84	20.70	0.59	35

### DIMENSION

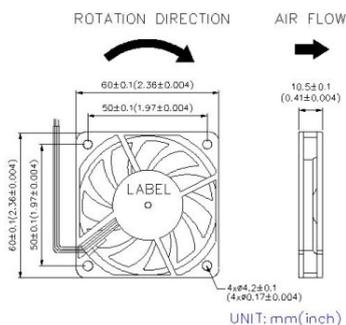

### AIR PERFORMANCE

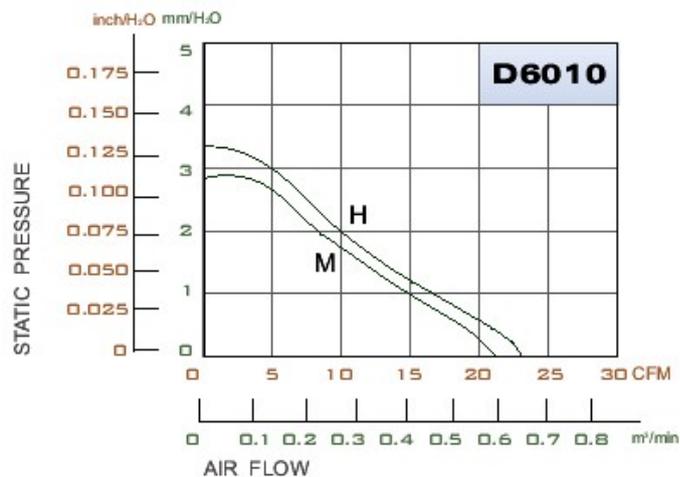

## ACTIVA INC.

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:sybang@seed.net.tw

# D6015 Series

60X60X15mm (2.36"X2.36"X0.59")


HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	35g
ROHS COMPLIANCE	Yes




**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D6015V12H	12	0.18	2.16	4500	0.13	3.30	22.40	0.63	32
D6015V12M	12	0.16	1.92	4000	0.11	2.70	20.22	0.57	29
D6015V24H	24	0.17	4.08	4500	0.15	3.90	23.40	0.66	35.5

**DIMENSION**

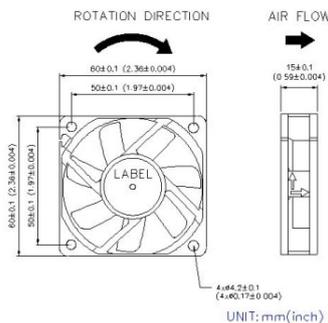

**AIR PERFORMANCE**

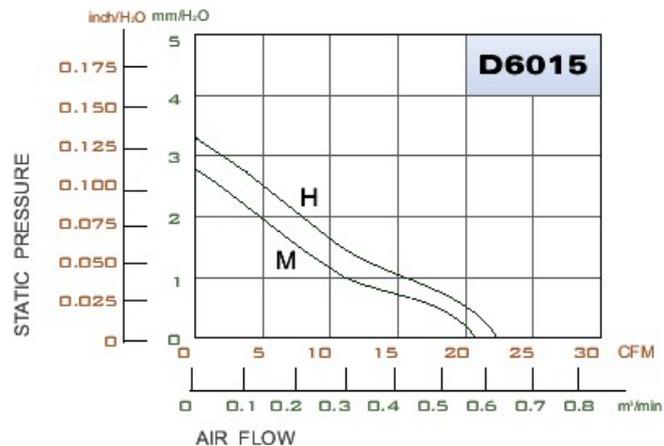

# D6020 Series

60X60X20mm (2.36"X2.36"X0.79")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	49g
ROHS COMPLIANCE	Yes


## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D6020V12SH	12	0.25	2.16	4800	0.23	5.73	23.40	0.66	35.5
D6020V12H	12	0.18	1.80	4200	0.18	4.57	20.30	0.57	30.4
D6020V12M	12	0.15	1.44	3600	0.14	3.44	17.30	0.49	26.2
D6020V12L	12	0.12	1.08	3000	0.09	2.29	13.80	0.39	23.4

## DIMENSION

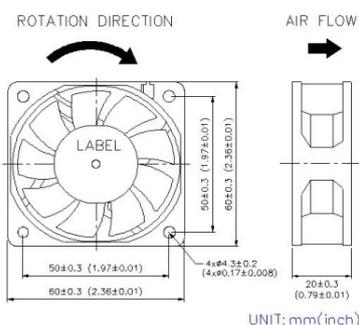

## AIR PERFORMANCE

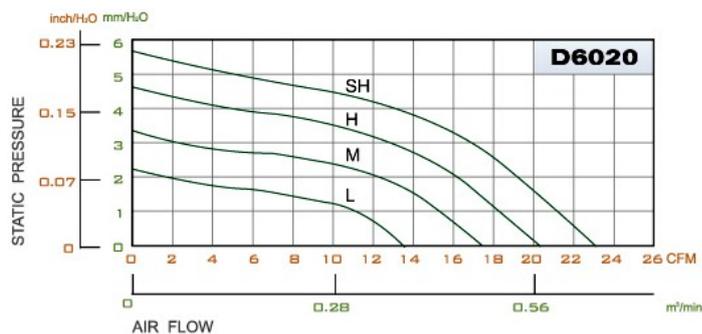

## ACTIVA INC.

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw

# D6025 Series

60X60X25mm (2.36"X2.36"X0.98")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	75g
ROHS COMPLIANCE	Yes

**SPECIFICATION**


MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D6025V12H	12	0.13	1.56	3800	0.16	4.12	19.50	0.55	30
D6025V12M	12	0.11	1.32	3200	0.12	3.10	16.70	0.47	25
D6025V12L	12	0.09	1.08	2600	0.07	1.80	12.80	0.36	23
D6025V24H	24	0.12	2.88	3800	0.16	4.12	19.50	0.55	30
D6025V24M	24	0.10	2.40	3200	0.12	3.10	16.70	0.47	25
D6025V24L	24	0.08	1.92	2600	0.07	1.80	12.80	0.36	23

**DIMENSION**

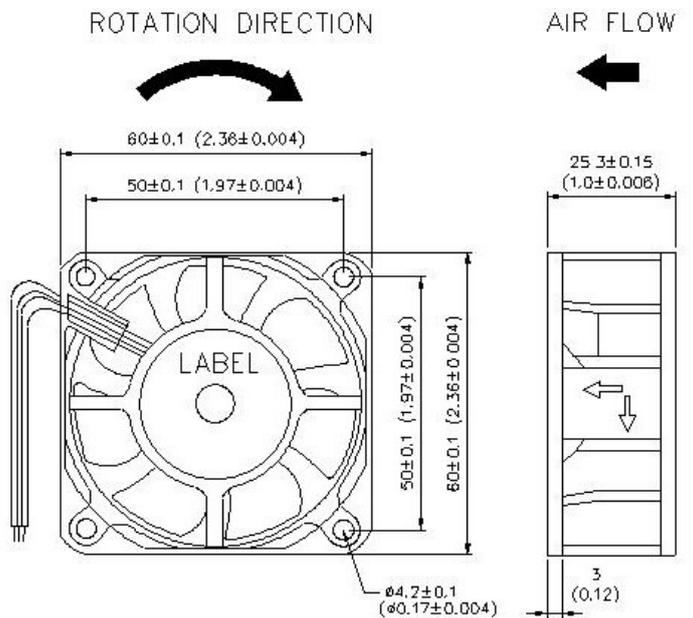

UNIT: mm(inch)

**AIR PERFORMANCE**

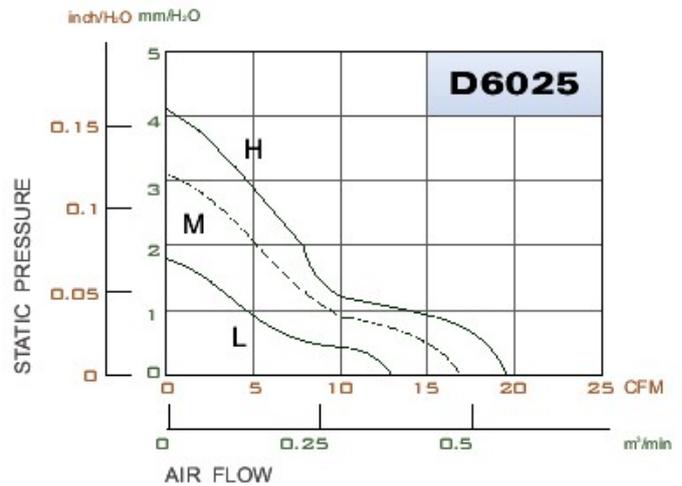

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw





HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	75g
ROHS COMPLIANCE	Yes

### SPECIFICATION


MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D6025V12SH-03	12	0.39	4.68	7000	0.53	13.40	38.40	1.09	47
D6025V12SM-03	12	0.34	4.08	6000	0.41	10.30	33.20	0.94	42
D6025V12SL-03	12	0.23	2.76	5000	0.29	7.25	27.40	0.78	38
D6025V24SH-03	24	0.22	5.28	7000	0.53	13.40	38.40	1.09	47
D6025V24SM-03	24	0.18	4.32	6000	0.41	10.30	33.20	0.94	42
D6025V24SL-03	24	0.13	3.12	5000	0.29	7.25	27.40	0.78	38

### DIMENSION

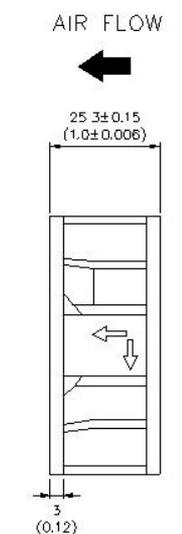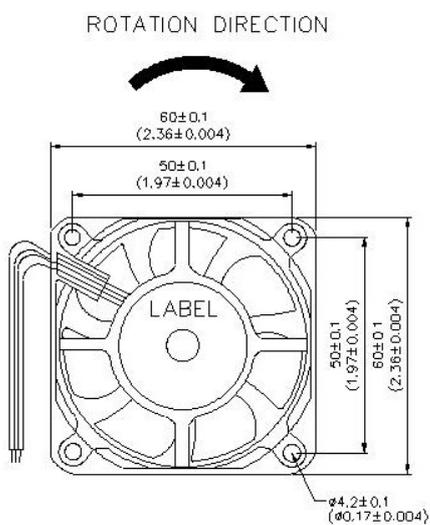

UNIT: mm(inch)

### AIR PERFORMANCE

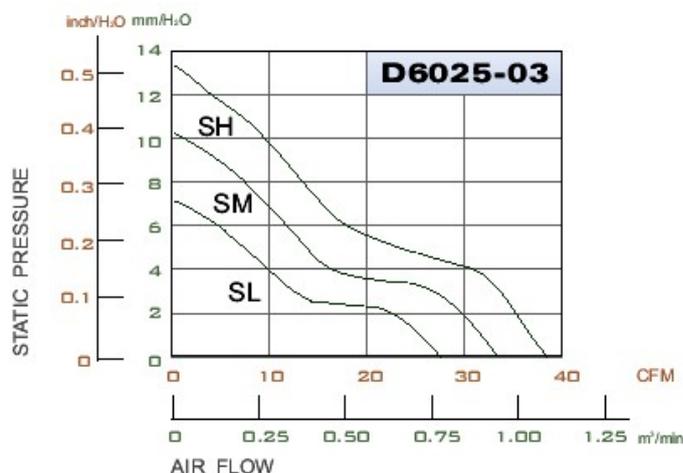

## ACTIVA INC.




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0;7 Blades
BEARING	Ball
OPERATING TEMPERATURE	-10 °C to +70 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	100g(3.52OZ)
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D6038V12H	12	1.60	19.20	10000	1.556	39.52	66.48	1.883	63.5
D6038V12M	12	1.20	14.40	9000	1.297	32.94	60.60	1.716	60.5
D6038V12L	12	0.85	10.20	8000	1.070	27.18	53.80	1.552	58.0
D6038V12XL	12	0.60	7.20	7000	0.813	20.64	46.85	1.327	55.0
D6038V12XXL	12	0.40	4.80	6000	0.599	15.22	39.90	1.130	50.0

**DIMENSION**

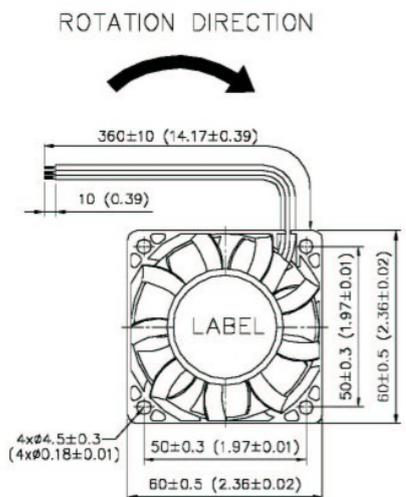


MOUNTION PANEL CUTOUT  
OUTLET SIDE & INLET SIDE

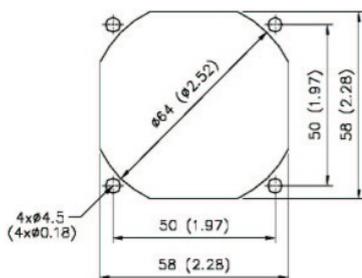

UNIT: mm(inch)

**AIR PERFORMANCE**

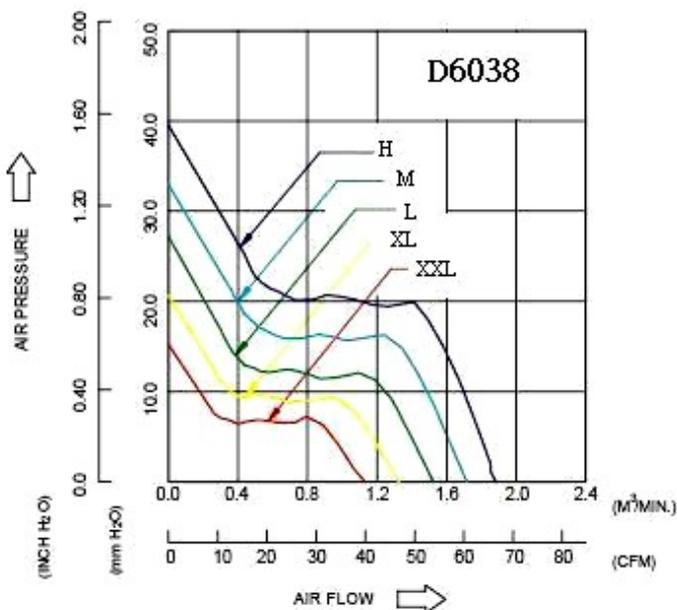

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw

# D6535 Series

Dia 65X35mm( Dia 2.56" x1.38" )


HOUSING	Thermoplastic PBT, UL94V - 0
IMPELLER	Thermoplastic PBT, UL94V - 0
BEARING	Ball
OPERATING TEMPERATURE	-10 °C to+ 60 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	75g
ROHS COMPLIANCE	Yes




**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D6535V12H	12	0.36	4.32	5600	0.3	7.8	34	0.96	40

**DIMENSION**

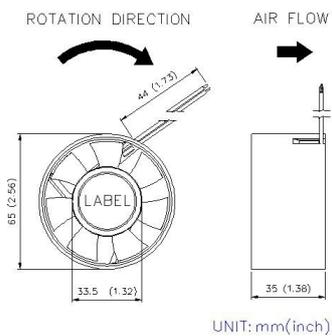

**AIR PERFORMANCE**

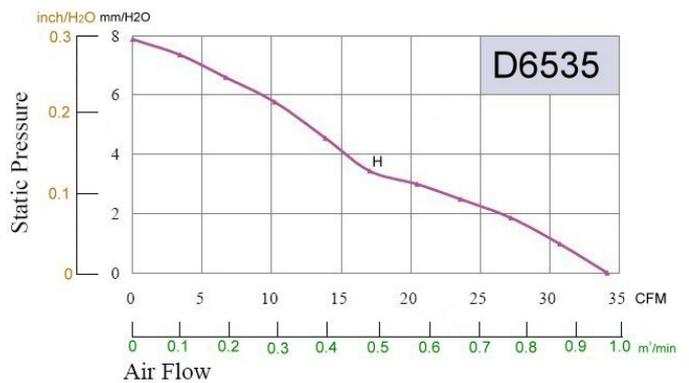

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw

# D7015 Series

70X70X15mm (2.76"X2.76"X0.59")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	51g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D7015V12SH	12	0.37	4.44	4500	0.24	6.16	37.1	1.10	42
D7015V12H	12	0.34	4.08	4200	0.20	5.00	34.8	1.05	39.4
D7015V12M	12	0.32	3.84	4000	0.19	4.70	31	0.98	38
D7015V24H	24	0.37	4.44	4200	0.24	6.16	34.8	1.10	42
D7015V24M	24	0.32	3.84	4000	0.19	4.70	31	0.98	38

**DIMENSION**

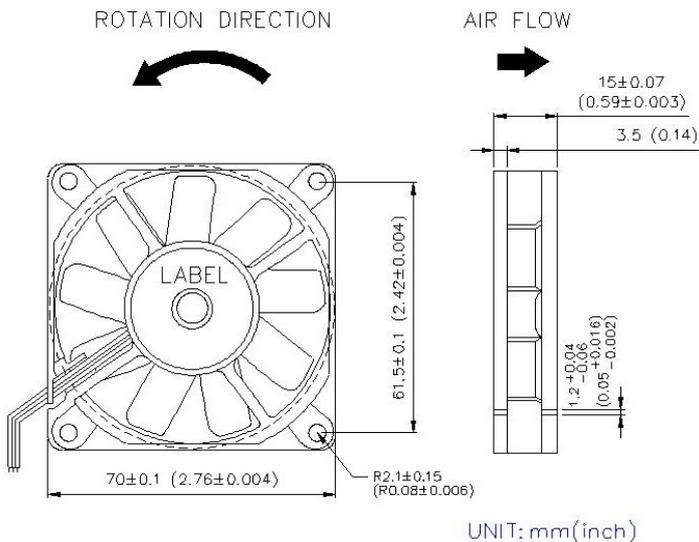

**AIR PERFORMANCE**

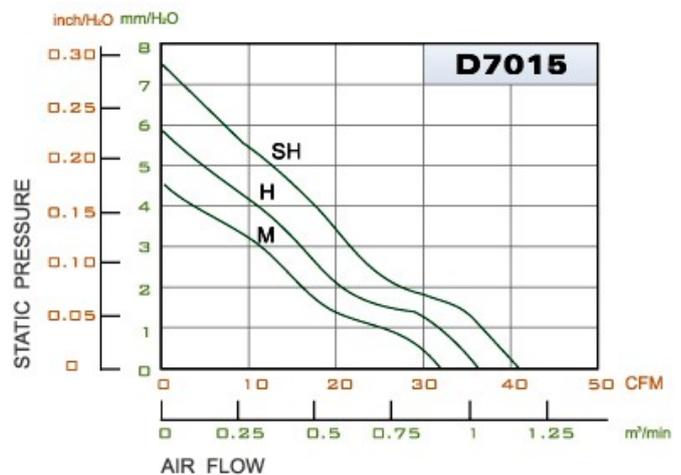

**ACTIVA INC.**

# D7025 Series

70X70X25mm (2.76"X2.76"X0.98")

HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	85g
ROHS COMPLIANCE	Yes



**SPECIFICATION**



MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D7025V12SH	12	0.62	7.44	6000	0.55	14	54	1.53	48
D7025V12H	12	0.52	6.24	5500	0.45	11.49	49.36	1.40	45
D7025V12M	12	0.33	3.93	5000	0.39	9.88	45.31	1.28	30

**DIMENSION**


**AIR PERFORMANCE**

ROTATION DIRECTION

AIR FLOW

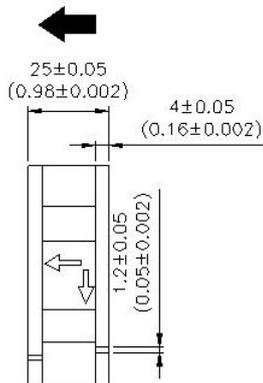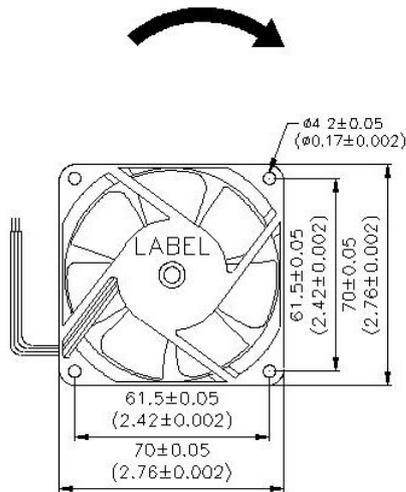

UNIT: mm(inch)

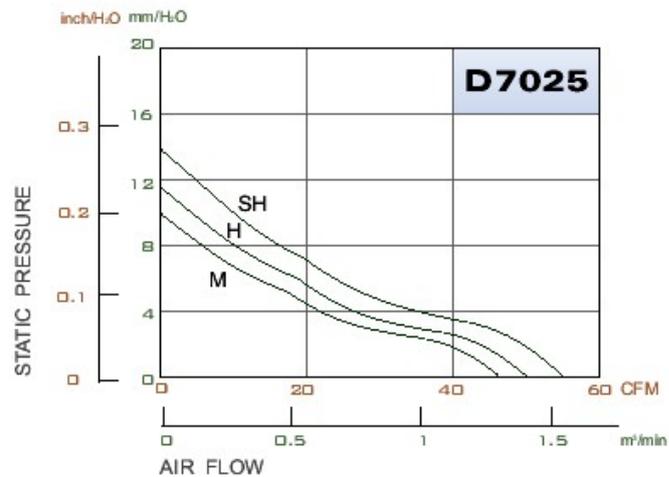

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	59g
ROHS COMPLIANCE	Yes

**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D8015V12SM	12	0.45	5.40	4000	0.22	5.50	51	1.44	42
D8015V12SL	12	0.35	4.20	3500	0.17	4.40	45	1.27	40
D8015V12H	12	0.22	2.64	3000	0.13	3.20	39	1.10	35
D8015V12M	12	0.17	2.04	2500	0.09	2.30	32	0.91	31
D8015V24SM	24	0.24	5.76	4000	0.22	5.50	51	1.44	42
D8015V24SL	24	0.18	4.32	3500	0.17	4.40	45	1.27	40
D8015V24H	24	0.14	3.36	3000	0.13	3.20	39	1.10	35
D8015V24M	24	0.12	2.88	2500	0.09	2.30	32	0.91	31

**DIMENSION**

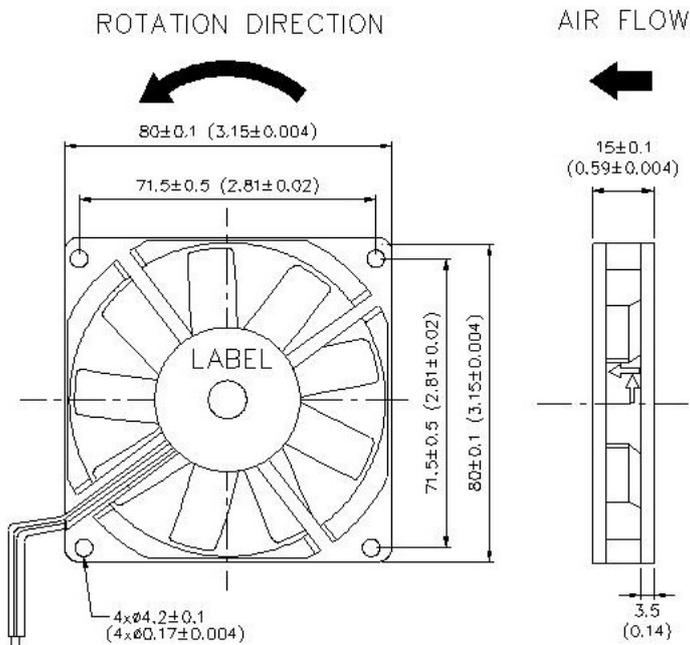

UNIT: mm(inch)

**AIR PERFORMANCE**



**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	100g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D8025V12H	12	0.20	2.40	3000	0.17	4.40	40	1.13	35
D8025V12M	12	0.16	1.92	2800	0.12	3	33	0.93	32
D8025V12L	12	0.12	1.44	2100	0.10	2.45	27.8	0.79	25
D8025V24H	24	0.13	3.12	3000	0.13	3.23	37.49	1.06	35
D8025V24M	24	0.11	2.64	2800	0.12	3	33	0.93	32
D8025V24L	24	0.09	2.16	2100	0.10	2.45	27.8	0.79	25

**DIMENSION**

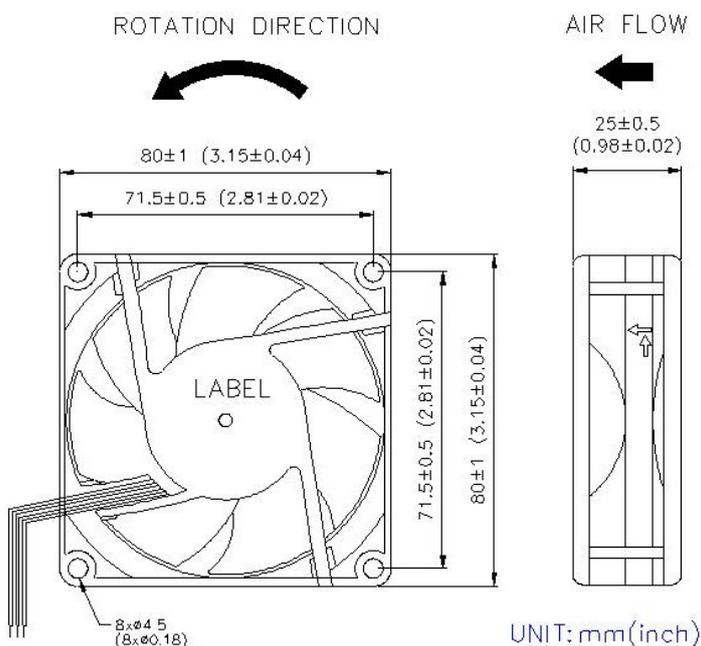

**AIR PERFORMANCE**

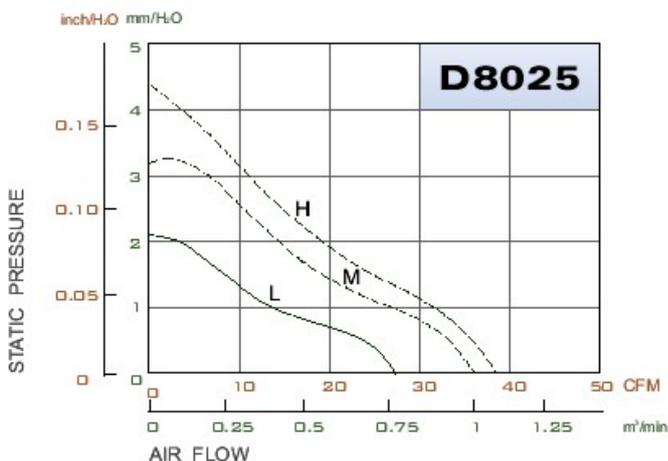




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	85g
ROHS COMPLIANCE	Yes


## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D8025V12SL-03	12	0.40	4.80	4000	0.29	7.38	55.53	1.57	41
D8025V12H-03	12	0.30	3.60	3300	0.18	4.54	44	1.25	36
D8025V12M-03	12	0.20	2.40	2700	0.13	3.24	37	1.05	30
D8025V12L-03	12	0.15	1.80	2100	0.09	2.18	30	0.85	24
D8025V24SL-03	24	0.25	6.00	4000	0.29	7.38	55.53	1.57	41
D8025V24H-03	24	0.21	5.04	3300	0.18	4.54	44	1.25	36
D8025V24M-03	24	0.17	4.80	2700	0.13	3.24	37	1.05	30
D8025V24L-03	24	0.12	2.88	2100	0.09	2.18	30	0.85	24

## DIMENSION

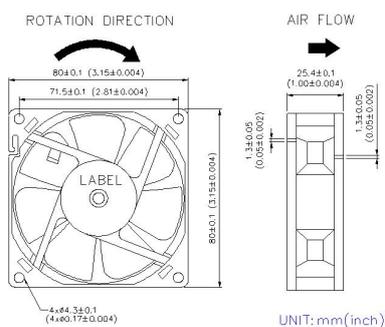

## AIR PERFORMANCE

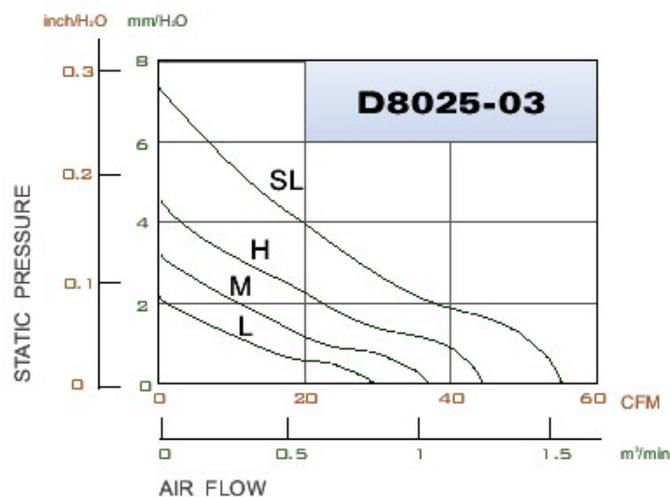

## ACTIVA INC.

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw

# D8038 Series

## 80X80X38mm (3.14"X3.14"X1.49")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0;7 Blades
BEARING	Ball
OPERATING TEMPERATURE	-10 °C to +70 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	173g
ROHS COMPLIANCE	Yes


### SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D8038V12S	12	0.97	11.64	5700	0.86	22.0	81.0	2.29	55.0
D8038V12H	12	0.64	7.68	4900	0.60	15.3	69.4	1.96	51.5
D8038V12M	12	0.42	5.04	4200	0.44	11.3	59.6	1.68	47.0
D8038V12L	12	0.27	3.24	3400	0.29	7.5	47.6	1.34	41.5
D8038V24S	24	0.42	10.08	5700	0.86	22.0	81.0	2.29	55.0
D8038V24H	24	0.28	6.72	4900	0.60	15.3	69.4	1.96	51.5
D8038V24M	24	0.20	4.8	4200	0.44	11.3	59.6	1.68	47.0
D8038V24L	24	0.13	3.12	3400	0.29	7.5	47.6	1.34	41.5
D8038V48S	48	0.20	9.6	5700	0.86	22.0	81.0	2.29	55.0
D8038V48H	48	0.15	7.2	4900	0.60	15.3	69.4	1.96	51.5
D8038V48M	48	0.11	5.28	4200	0.44	11.3	59.6	1.68	47.0
D8038V48L	48	0.08	3.84	3400	0.29	7.5	47.6	1.34	41.5

### DIMENSION

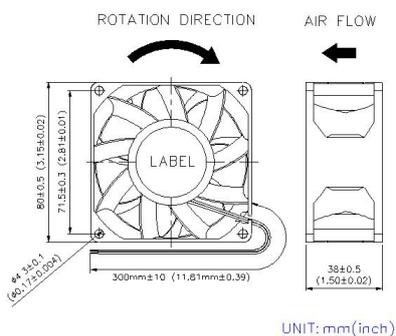

### AIR PERFORMANCE

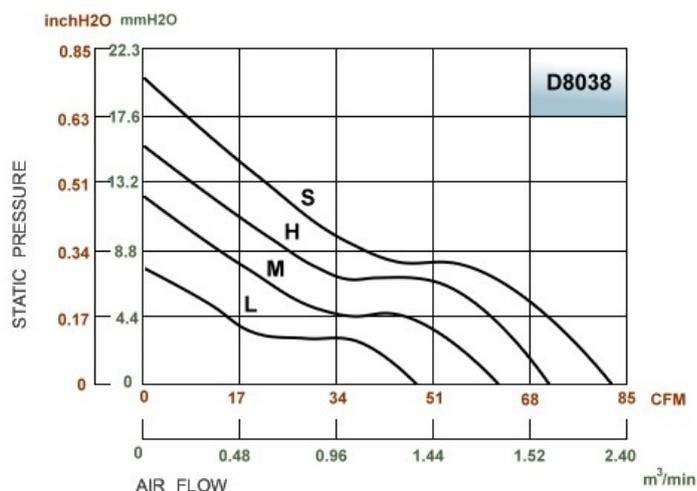

## ACTIVA INC.

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	120g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D9225V12H	12	0.32	3.84	3000	0.17	4.30	58.70	1.66	38
D9225V12M	12	0.20	2.40	2500	0.14	3.50	50.50	1.43	34
D9225V12L	12	0.16	1.92	2000	0.09	2.30	41.50	1.18	28
D9225V24H	24	0.18	4.32	3000	0.17	4.30	58.70	1.66	38
D9225V24M	24	0.14	3.36	2500	0.14	3.50	50.50	1.43	34
D9225V24L	24	0.10	2.40	2000	0.09	2.30	41.50	1.18	28

**DIMENSION**

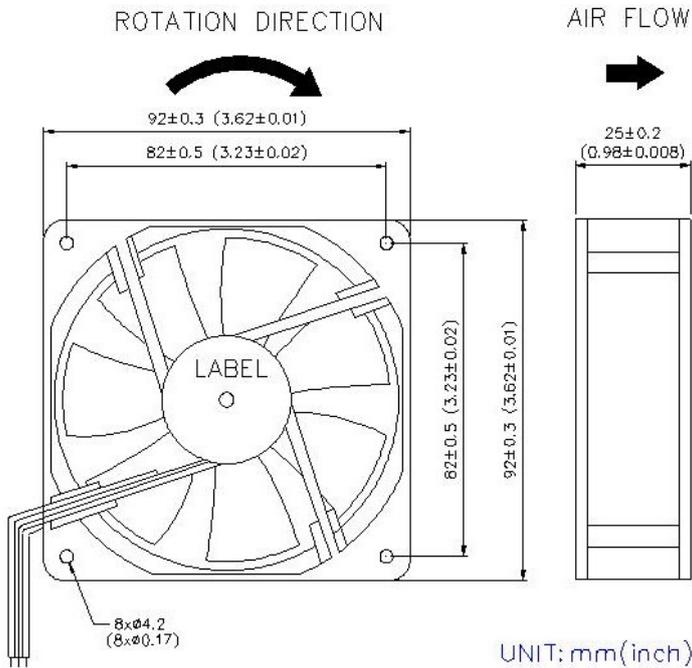

**AIR PERFORMANCE**

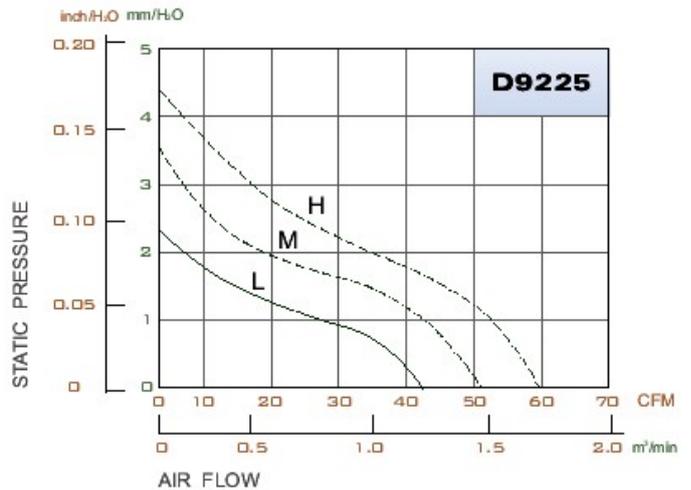

# D9232 Series

92X92X32mm (3.62"X3.62"X1.25")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	183g
ROHS COMPLIANCE	Yes

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D9232V12M	12	0.27	3.24	3200	0.27	6.9	58.7	1.66	42
D9232V12H	12	0.49	5.88	4000	0.42	10.7	73.3	2.07	47
D9232V12S	12	0.80	9.6	4700	0.56	14.3	86.8	2.45	51
D9232V24M	24	0.17	4.08	3200	0.27	6.9	58.7	1.66	42
D9232V24H	24	0.26	6.24	4000	0.42	10.7	73.3	2.07	47
D9232V24S	24	0.42	10.08	4700	0.56	14.3	86.8	2.45	51
D9232V48M	48	0.12	5.76	3200	0.27	6.9	58.7	1.66	42
D9232V48H	48	0.21	10.08	4000	0.42	10.7	73.3	2.07	47

## DIMENSION

ROTATION DIRECTION AIR FLOW

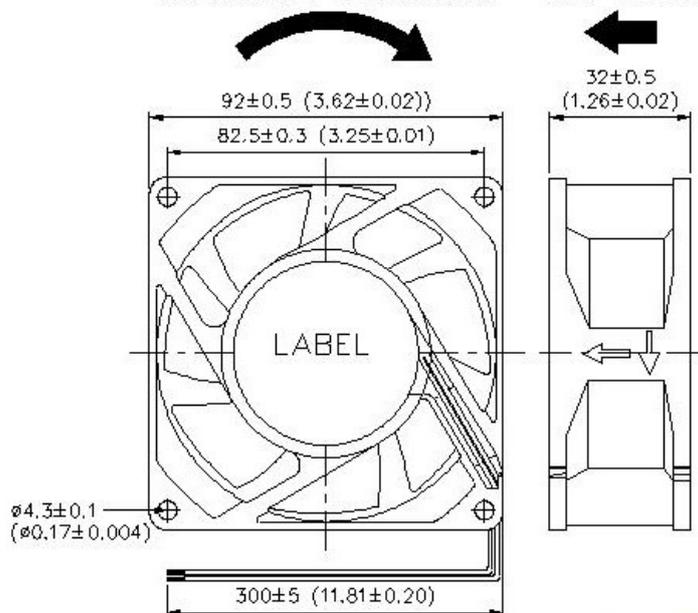

UNIT:mm(inch)

## AIR PERFORMANCE



## ACTIVA INC.

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
TEL:886-7-2824356 FAX:886-7-2414287  
Website:www.activa.com.tw Email:symbang@seed.net.tw

# D9238 Series

92X92X38mm (3.62"X3.62"X1.50")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	198.4g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D9238V12LB	12	0.54	6.48	3300	0.3	7.8	80.5	2.27	48
D9238V12MB	12	0.7	8.4	3800	0.42	10.9	92.6	2.62	51
D9238V12HB	12	1.33	15.96	4300	0.46	11.9	102.9	2.91	55
D9238V12SB	12	2.0	24	4900	0.61	15.5	117.3	3.31	57

**DIMENSION**

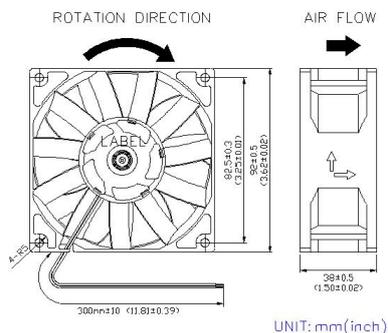

**AIR PERFORMANCE**

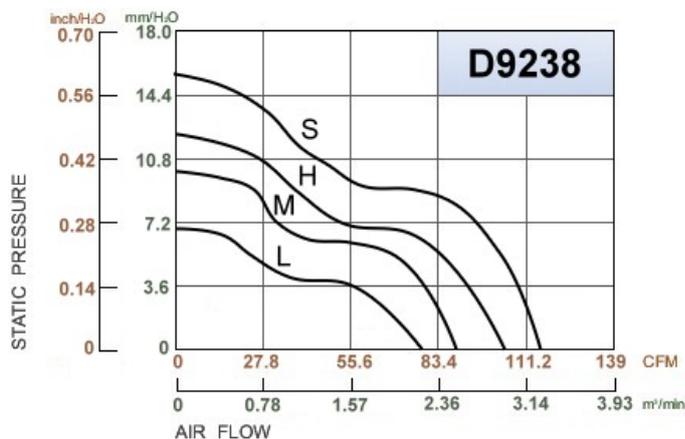

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	278g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
DB12032V12H	12	0.65	7.80	2500	0.64	16.26	25.20	0.713	51.1
DB1032V12M	12	0.60	7.20	2300	0.62	15.77	23.70	0.671	51.0
DB12032V12L	12	0.15	1.80	1200	0.11	2.77	12.00	0.340	34.3
DB12032V24H	24	0.43	10.32	2500	0.64	16.26	25.20	0.713	51.1
DB12032V24M	24	0.40	9.60	2300	0.62	15.77	23.70	0.671	51.0
DB12032V24L	24	0.13	3.12	1200	0.11	2.77	12.00	0.340	34.3

**DIMENSION**

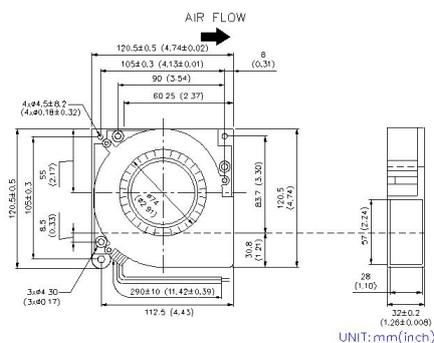

**AIR PERFORMANCE**

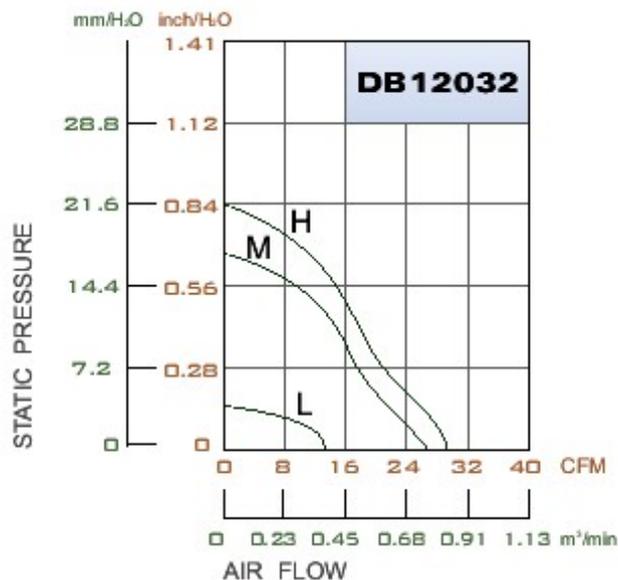

**ACTIVA INC.**




HOUSING	Aluminum die-cast, Natural
IMPELLER	Aluminum
BEARING	Ball
OPERATING TEMPERATURE	-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	700g
ROHS COMPLIANCE	Yes

**SPECIFICATION**


MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
DB15458V12H	12	1.0	24	2800	2.34	59.47	96	2.71	46
DB15458V24H	24	1.2	28.8	2800	2.34	59.47	96	2.71	46

**DIMENSION**

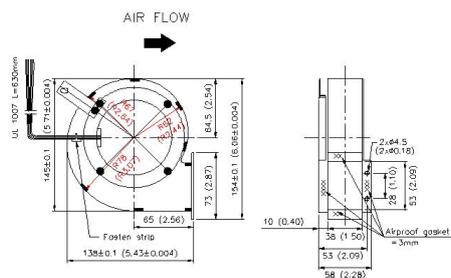

UNIT:mm(inch)

**AIR PERFORMANCE**

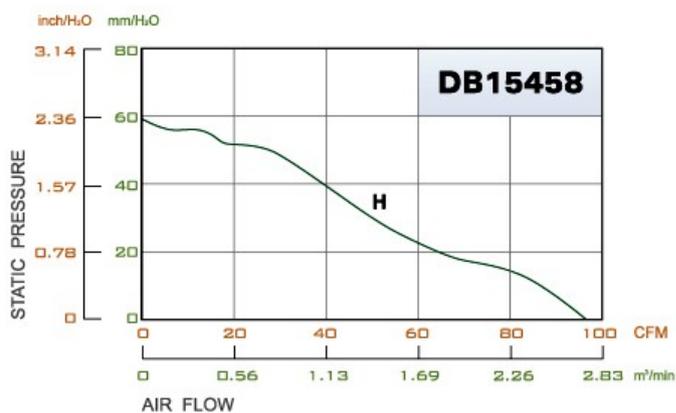




HOUSING	SGCC
IMPELLER	Thermoplastic PBT of UL 94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10 °C To +70 °C
INSULATION RESISTANCE	10megOhms Min. @250VDC(Between Frame and Terminal)
DIELECTRIC STRENGTH	5mA Max. at 700VAC for 1 second (Between Frame and Terminal)
WEIGHT	1150g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
DB18080V48H	48	0.55	26.4	4050	2.146	54.5	110	3.115	66.5

**DIMENSION**

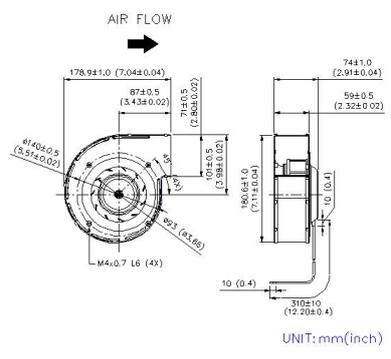

**AIR PERFORMANCE**

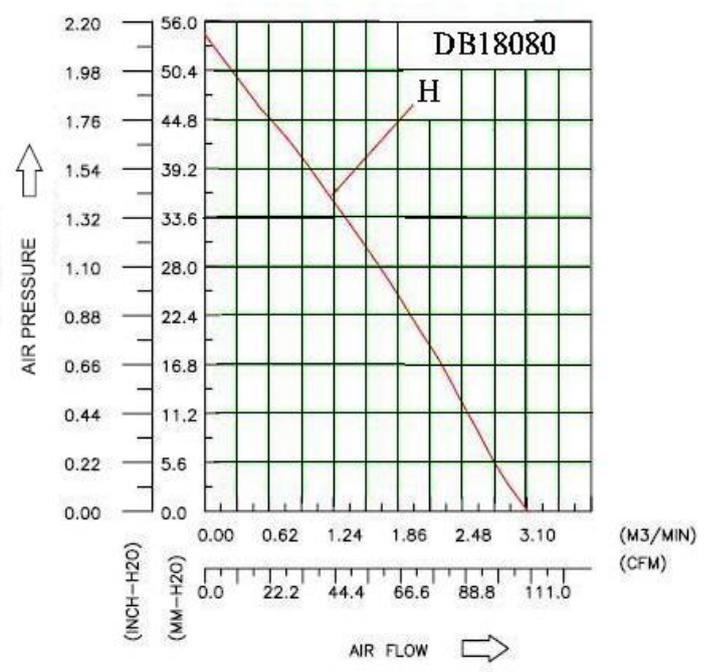

**ACTIVA INC.**

# DB3507 Seires

## 35X35X7.5mm(1.38"X1.38"X0.30")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	One Ball One Sleeve
OPERATING TEMPERATURE	-10 °C to +70 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	13g
ROHS COMPLIANCE	Yes


### SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
DB3507V5HO	5.0	0.23	1.15	7500	0.260	6.51	1.33	0.038	28.3
DB3507V5MO	5.0	0.14	0.70	6500	0.192	4.79	1.11	0.031	23.0
DB3507V5LO	5.0	0.10	0.50	5500	0.126	3.20	0.09	0.003	19.0
DB3507V12MO	12.0	0.12	0.14	6500	0.192	4.79	1.11	0.031	23.0

### DIMENSION

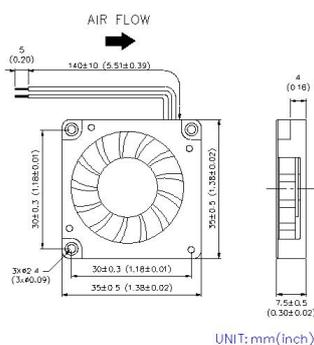

### AIR PERFORMANCE

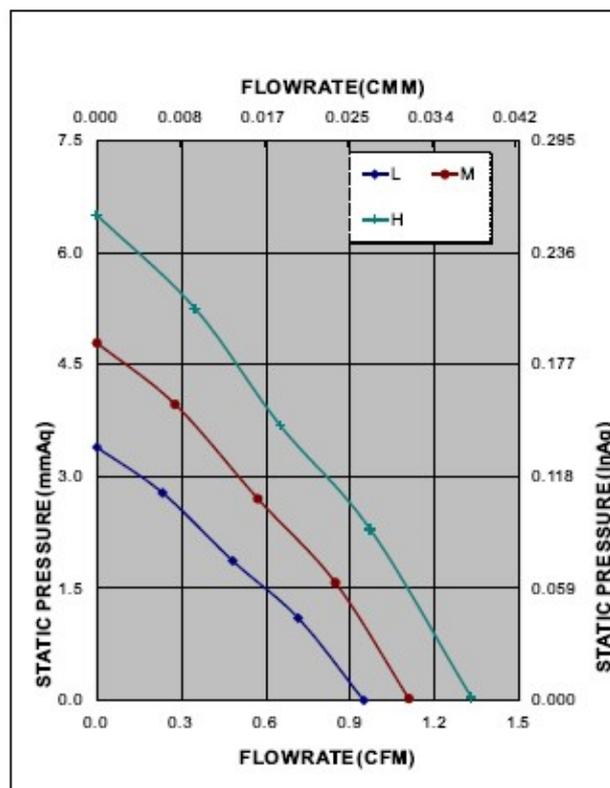

## ACTIVA INC.

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	28g
ROHS COMPLIANCE	Yes


### SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
DB5015V5L	5	0.17	0.85	4500	0.35	8.9	3.3	0.09	36
DB5015V5M	5	0.31	1.55	5500	0.52	13.4	4.1	0.11	41
DB5015V12L	12	0.08	0.96	4500	0.35	8.9	3.3	0.09	36
DB5015V12M	12	0.12	1.5	5500	0.52	13.4	4.1	0.11	41
DB5015V12H	12	0.21	2.52	6500	0.76	19.5	4.8	0.13	45
DB5015V24L	24	0.06	1.56	4500	0.35	8.9	3.3	0.09	36
DB5015V24M	24	0.09	2.16	5500	0.52	13.4	4.1	0.11	41
DB5015V24H	24	0.13	3.12	6500	0.76	19.5	4.8	0.13	45

### DIMENSION

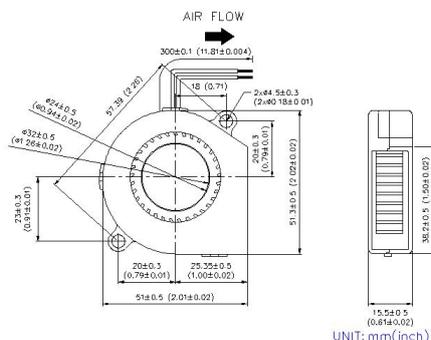

### AIR PERFORMANCE

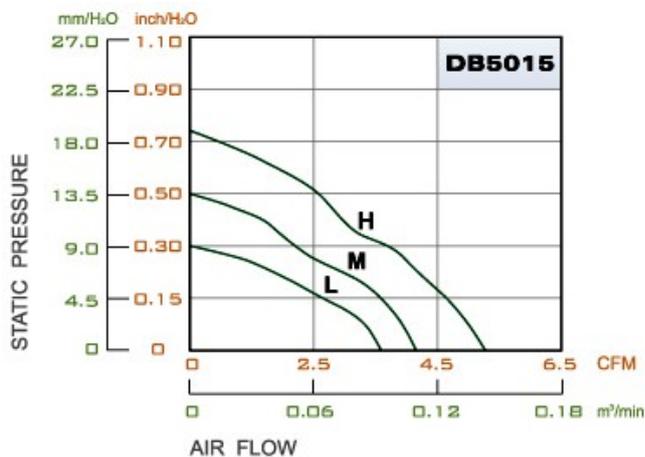

### ACTIVA INC.

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve or Ball
OPERATING TEMPERATURE	Sleeve Bearing:-10 °C to +70 °C Ball Bearing:-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	95g
ROHS COMPLIANCE	Yes


**SPECIFICATION**

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
DB7630V12SH	12	0.25	3.00	3100	0.41	10.50	11.50	0.33	41
DB7630V12H	12	0.20	2.40	2600	0.25	6.33	8.94	0.25	35
DB7630V12M	12	0.10	1.20	2000	0.14	3.50	6.20	0.18	23
DB7630V24H	24	0.12	2.88	2600	0.25	6.33	8.94	0.25	35

**DIMENSION**

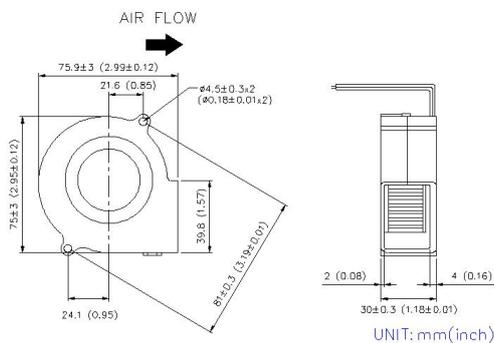

**AIR PERFORMANCE**

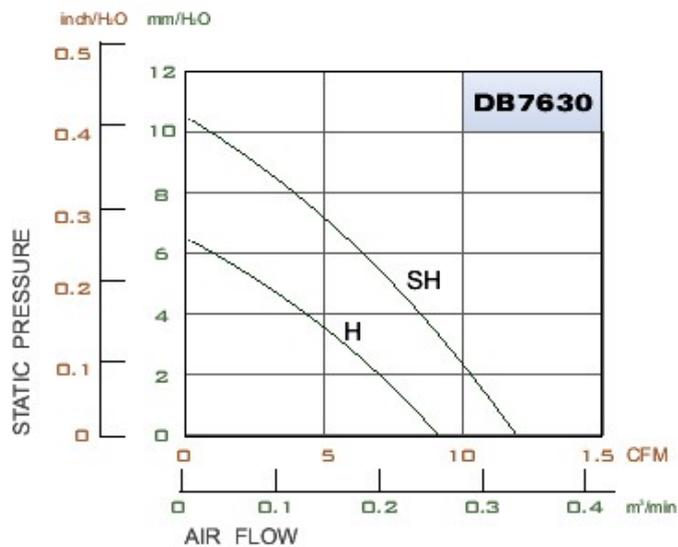

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-30 °C to +75 °C
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
WEIGHT	165g
ROHS COMPLIANCE	Yes

**SPECIFICATION**


MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		Maximum Air Flow		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
DB9733V12H	12	0.86	10.32	3600	1.00	25.4	26	0.74	51
DB9733V12M	12	0.64	7.68	3200	0.75	19.05	23	0.65	48
DB9733V12L	12	0.48	5.76	2600	0.52	13.20	19	0.54	44
DB9733V24H	24	0.60	14.40	3600	1.00	25.4	26	0.74	51
DB9733V24M	24	0.40	9.60	3200	0.75	19.05	23	0.65	48
DB9733V24L	24	0.15	3.60	2600	0.52	13.20	19	0.54	44

**DIMENSION**

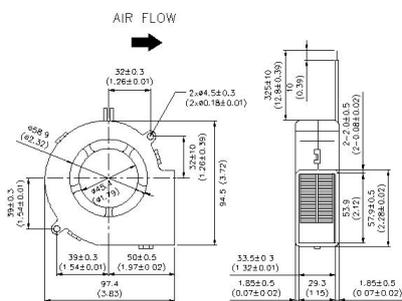

UNIT: mm(inch)

**AIR PERFORMANCE**

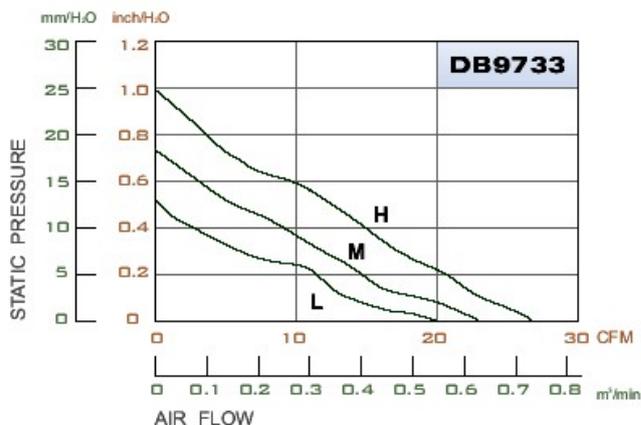

**ACTIVA INC.**

9F-1, 472, Chung San 2nd Road, Kaohsiung 800, Taiwan, R.O.C.  
 TEL:886-7-2824356 FAX:886-7-2414287  
 Website:www.activa.com.tw Email:symbang@seed.net.tw