

Fan Series

F2E-162B



Certification	Impeller	Protection class
CE	Black plastic PBT	IP44

- **Frame** Aluminum die-casting, surfaces is finished by anti-corrosion treatment with primary color or black electrophoresis
- **Impeller** Metal impellers are welded to motor rotor, and surface is finished by black electrophoresis anti-corrosion treatment
- **Operation Temperature/Humidity**
Temperature -30℃~+65℃ (temperature) 0%~95%(humidity)
- **Protection** Motor Internal with automatic recovery thermal protector
- **Withstand Voltage** AC 1,800V, 1 min at 0.5mA, 50/60 Hz
- **Insulation Grade** Design according to IEC61858 Grade F,



172×162×51mm

Dimensions

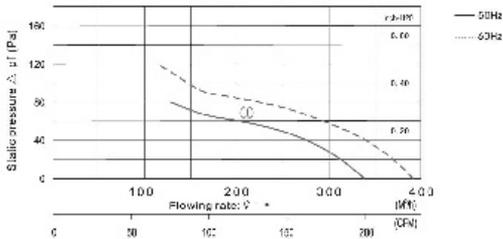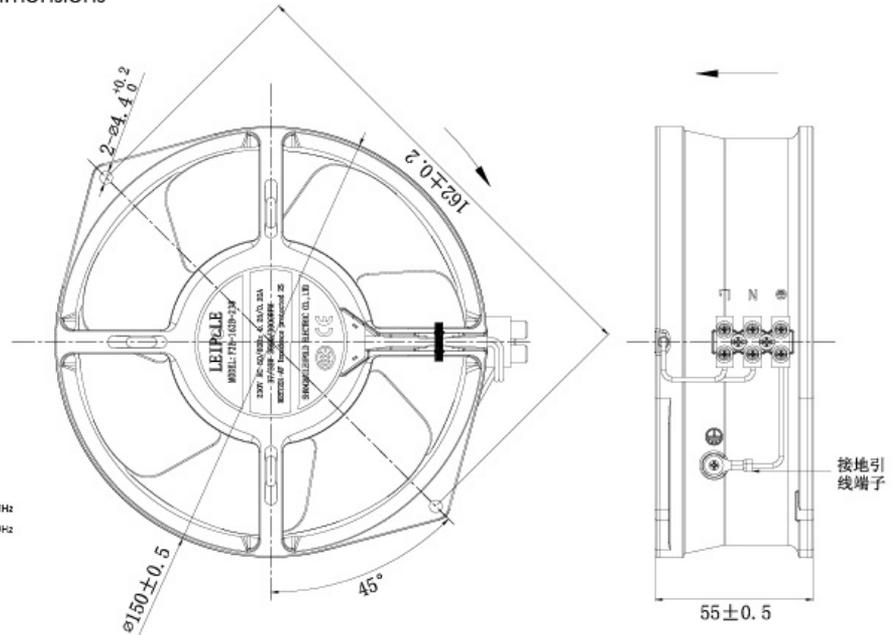

1. Rotation direction of blades: CCW seen from the front impellers
2. Power Connection: UL3385-22 Lead wire
3. Unit weight: 1.1kg

Model	Order Code	Bearing	Voltage V	Frequency Hz	Current (A)	Power (W)	Speed (r/min)	Air Flow (m³/h)	Noise (dB)	Weight (kg)
F2E-162B-230	2018.015	ball	220/230	50/60	0.26/0.20	37/33	2650/3000	325/380	48/52	1.1
F2E-162B-115	2018.016	ball	110/115	50/60	0.51/0.42	38/35	2650/3000	325/380	48/52	1.1