

Fan Series

F2E-320B



Certification	Impeller	Protection class
CE	Black plastic PBT	IP34

- **Frame** Aluminum die-casting, surfaces is finished by anti-corrosion treatment with primary color or black electrophoresis
- **Impeller** Metal impellers are welded to motor rotor, and surface is finished by black electrophoresis anti-corrosion treatment
- **Operation Temperature/Humidity**
Temperature -30°C~+65°C (temperature) 0%~95%(humidity)
- **Protection** Motor Internal with automatic recovery thermal protector
- **Withstand Voltage** AC 1,800V, 1 min at 0.5mA, 50/60 Hz
- **Insulation Grade** Design according to IEC61858 Grade F,



320×280×80mm

Dimensions

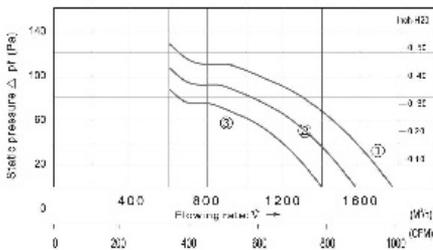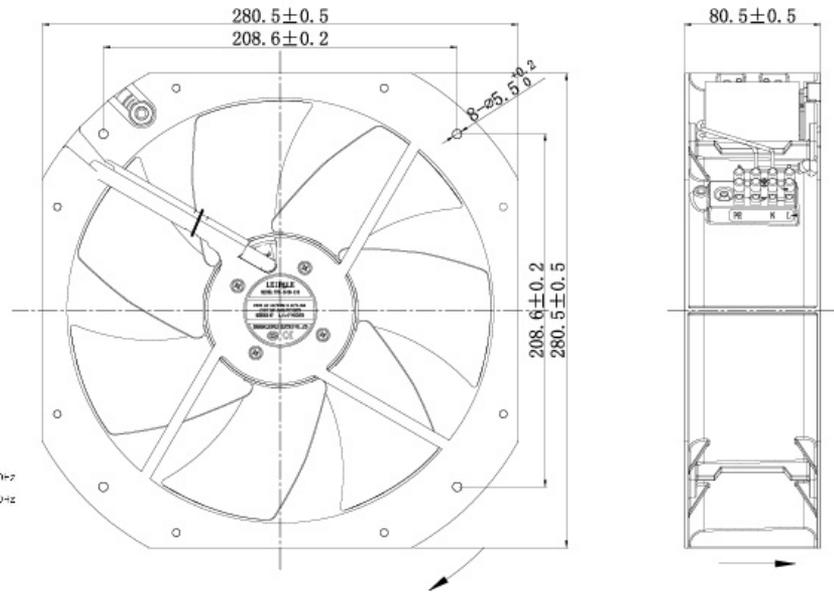

1. Rotation direction of blades: CCW seen from the front impellers
2. Power Connection: UL3385-22 Lead wire
3. Unit weight: 2.9kg

Model	Order Code	Bearing	Voltage V	Frequency Hz	Current (A)	Power (W)	Speed (r/min)	Air Flow (m³/h)	Noise (dB)	Weight (kg)
F2E-320B-230	2018.023	ball	220/230	50/60	0.46/0.60	100/140	2500/2650	1800/1950	68/70	2.9
F2E-320B-115	2018.024	ball	110/115	50/60	1.10/1.20	100/140	2500/2650	1800/1950	68/70	2.9