


RC unit

ELECTROMAGNETIC INTERFERENCE SUPPRESSION CAPACITORS WITH SERIES RESISTOR

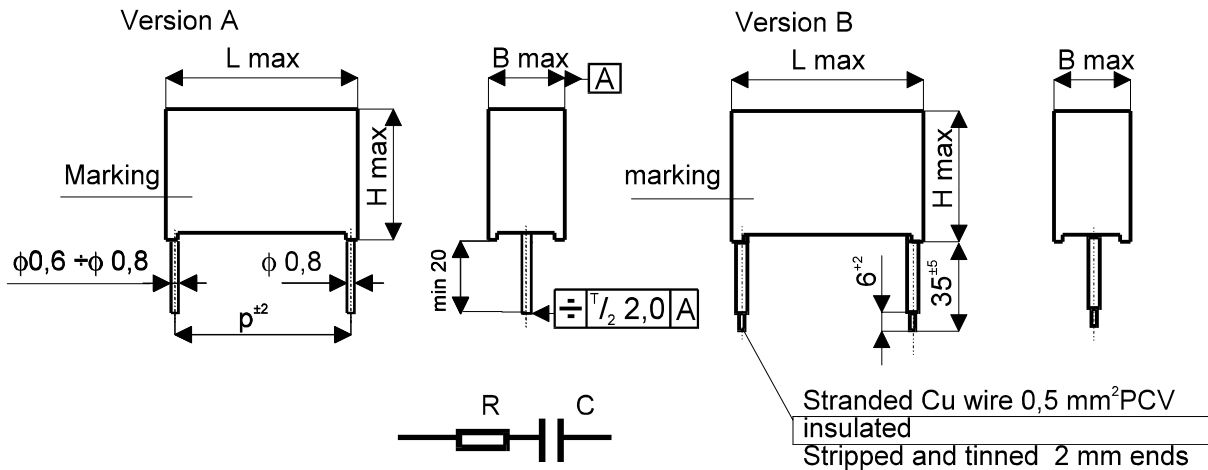

TECHNICAL DATA

Climatic category	40/085/21/C
Rated capacitance	see table
Tolerance on capacitance	see table
Rated voltage	250 / 275 V a.c.
Series resistance	see table
Tolerance on resistance	$\pm 10 \%$
Insulation resistance between terminals :	
$C_R > 0.33 \mu F$	5000 s
$C_R \leq 0.33 \mu F$	15 000 M Ω
Power rating	0.5 W
Technical Specifications:	WT-79/MIFLEX/RC

The RC unit capacitors meet the requirements of EN 60384-14.

RC unit

ELECTROMAGNETIC INTERFERENCE SUPPRESSION CAPACITORS WITH SERIES RESISTOR

Rated Capacitance	Tolerance on capacitance	Resistor Value	Dimensions			
			B max	H max	L max	p ±2
μF	%	Ω	mm			
0.015	± 10	10, 27, 47, 100, 220, 470, 1000 Power 0.5 W	8.0	17.0	18.0	15.0
0.022				17.5	27.0	22.5
0.033			9.0			
0.047				21.5		
0.068			11.5	20.5	32.0	27.5
0.10				27.0		
0.15			13.5	27.0	32.0	27.5
0.22				28.0		
0.25			15.0	28.0	32.0	27.5
0.33				28.0		
0.47			15.0	28.0	32.0	27.5
0.50				28.0		
0.68			15.0	28.0	32.0	27.5
1.00				28.0		

 **MIFLEX S.A.**

ZAKŁADY PODZESPOŁÓW RADIOWYCH
99-300 KUTNO UL. GRUNWALDZKA 3
POLAND

Phone: 0048 24 355 11 00÷02

Fax: 0048 24 355 11 88

E-mail: miflex@miflex.com.pl

Revision date: 05.05.2008