

Power Transistor Array STA464C


Absolute Maximum Ratings (Ta=25°C)

Symbol	Ratings	Unit
V _{CB0}	65±5	V
V _{CEO}	65±5	V
V _{EB0}	6	V
I _C	6 (pulse 10)	A
I _B	1	A
P _C	20 (T _c =25°C)	W
	4 (T _a =25°C)	
T _J	150	°C
T _{stg}	-55 to +150	°C

Electrical Characteristics (Ta=25°C)

Symbol	Test Conditions	Ratings			Unit
		min	typ	max	
I _{CB0}	V _{CB} =60V			10	μA
I _{EB0}	V _{EB} =6V			10	μA
V _{CEO}	I _C =50mA	60	65	70	V
h _{FE}	V _{CE} =1V, I _C =1A	400	800	1500	
V _{CE (sat)}	I _C =1.5A, I _B =15mA		0.09	0.15	V
V _{FEC}	I _{FEC} =6A		1.25	1.5	V
Es/b	L=10mH	80			mJ

External Dimensions STA4

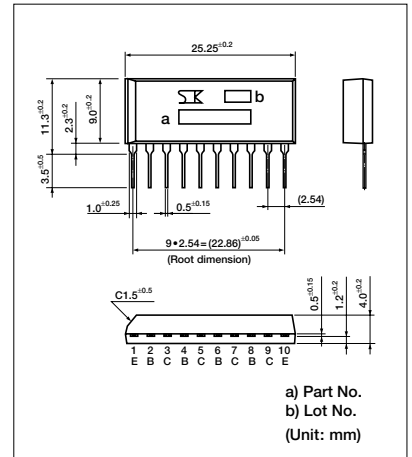

Equivalent Circuit Diagram

