

Model: TLP-96111/A/S

TADIRAN LITHIUM BATTERIES


- HIGH ENERGY
- UP TO 3A PULSE CAPABILITY
- INSTANT VOLTAGE RESPONSE
- SAFER THAN SPIRAL WOUND CELLS

Preliminary Issue

PERFORMANCE DATA @ 25°C:

■ Capacity to 3.0 V (@ 100 mA @ 1% duty cycle)	1.1 Ah
■ Open circuit voltage	3.67 V
■ Maximum 1 second pulse to 3.0 V	3 A
■ Delay time to 3.0 V (@ 400 mA after 1 year)	<1 msec.
■ Weight	37 gr.
■ Capacity retention after 10 years	85%
■ Operating temperature	-40°C to +85°C

VOLTAGE VS. PULSE WIDTH

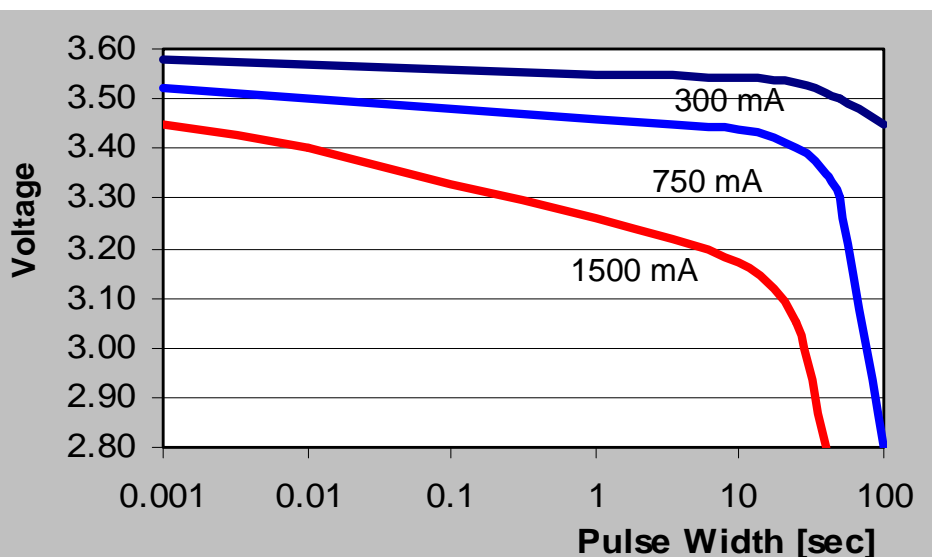

Available Terminations:

TLP-96111/A/S
Standard
Cat. No. 61961111400

NOTE:
SPECIAL CONNECTORS ARE
AVAILABLE UPON REQUEST.

PATENTED TECHNOLOGY

PulsesPlus For High Pulse-Current Applications


Any representation in this brochure concerning performance are for information purposes only and not warranties, either expressed or implied, of future performance.

Nov. 00

Model: TLP-96111/A/S

TADIRAN LITHIUM BATTERIES

DISCHARGE CHARACTERISTICS @ 25°C

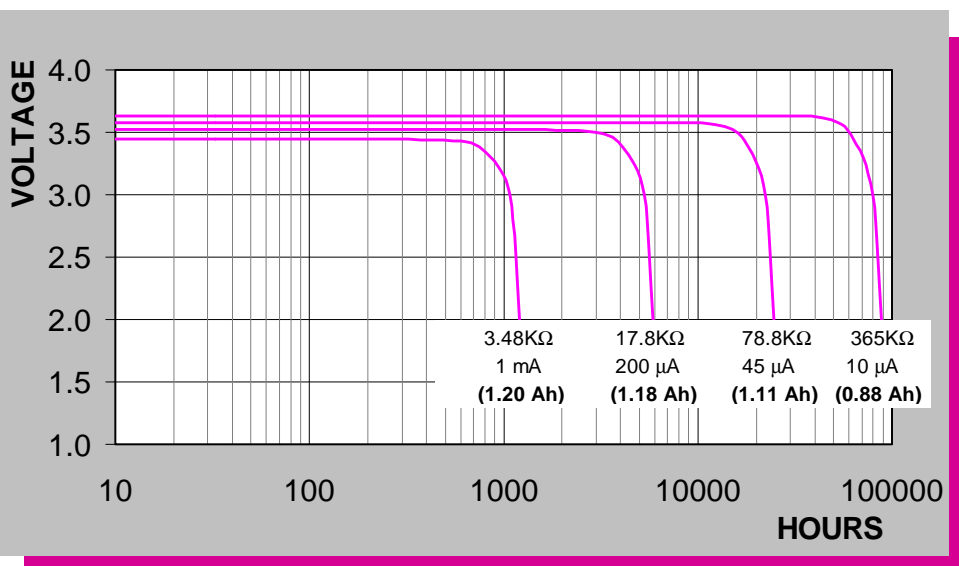

PATENTED TECHNOLOGY


PulsesPlus For High Pulse-Current Applications

Any representation in this brochure concerning performance are for information purposes only and not warranties, either expressed or implied, of future performance.


TADIRAN LITHIUM BATTERIES

TLP-96111/A/S


Minimum Voltage vs. Temp. for 1 sec Pulse Width

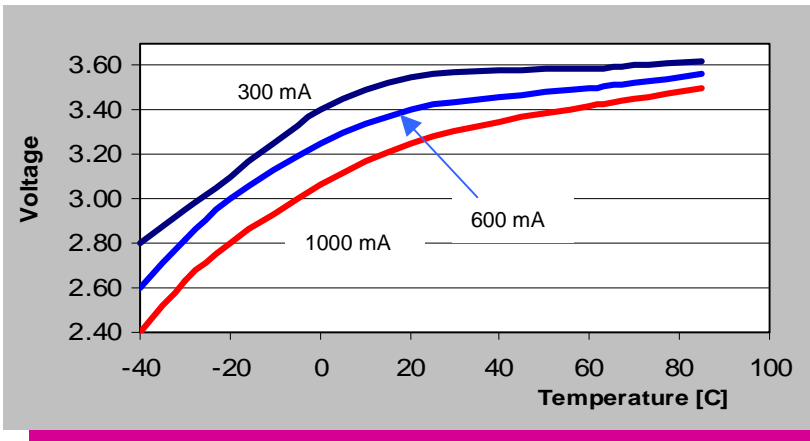

Capacity Retention vs. Temperature

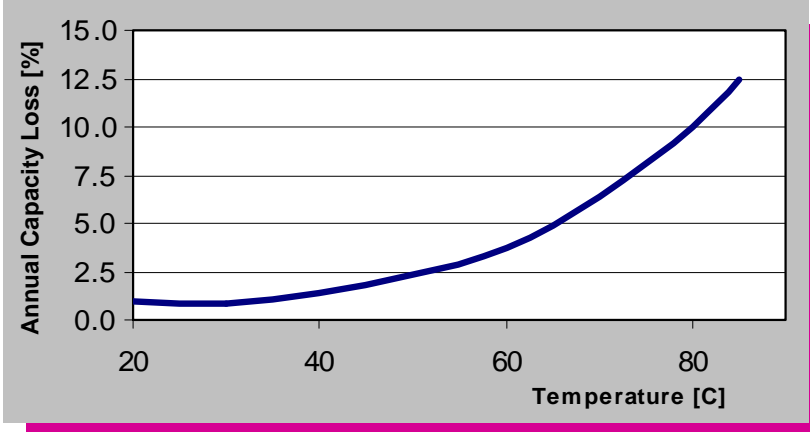

Maximum Pulse Width to Min. Voltage of 3.0V at RT

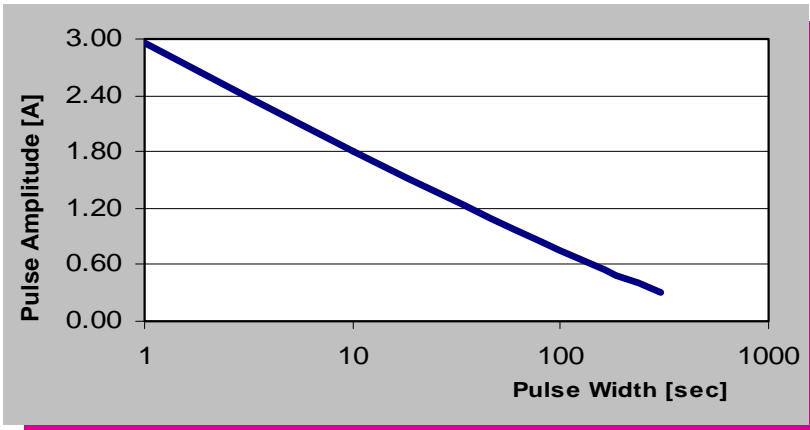



PATENTED TECHNOLOGY

PulsesPlus For High Pulse-Current Applications


Any representation in this brochure concerning performance are for information purposes only and not warranties, either expressed or implied, of future performance.

Model: TLP-96111/A/S

TADIRAN LITHIUM BATTERIES

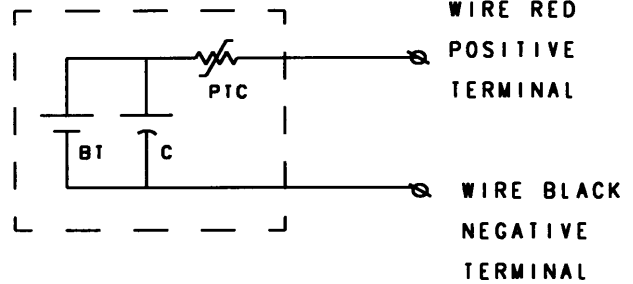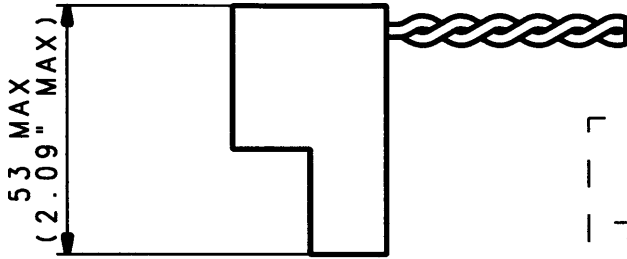

BT: TL-5902
C: HLC-1550
PTC: SRP 200

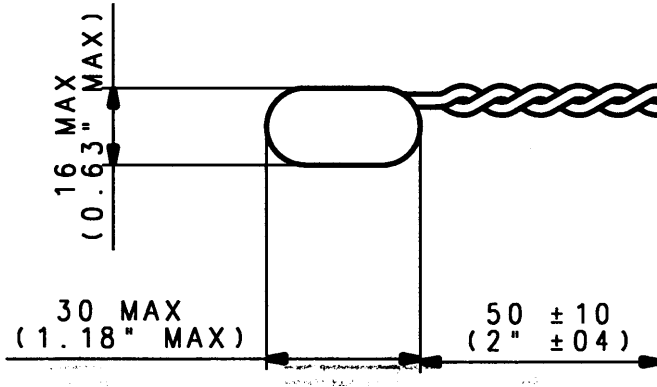

PATENTED TECHNOLOGY

PulsesPlus For High Pulse-Current Applications

Any representation in this brochure concerning performance are for information purposes only and not warranties, either expressed or implied, of future performance.