

FP-108M/DC


120 x 120 x 25.4 mm

DESIGN FEATURES


- * **Bearing System:**
Sleeve bearing & ball bearing
- * **Impeller:**
Plastic with fiber glass filed UL 94V-0
- * **Housing:**
Plastic with fiber glass filed UL 94V-0
- * **Motor:**
Brushless DC
- * **Connecting:**
Wire leads
- * **Speed:**
S-1 high speed type
S-2 medium speed type
S-3 low speed type
- * Available FG Type for Speed Sensor Signal



Dimensions: mm

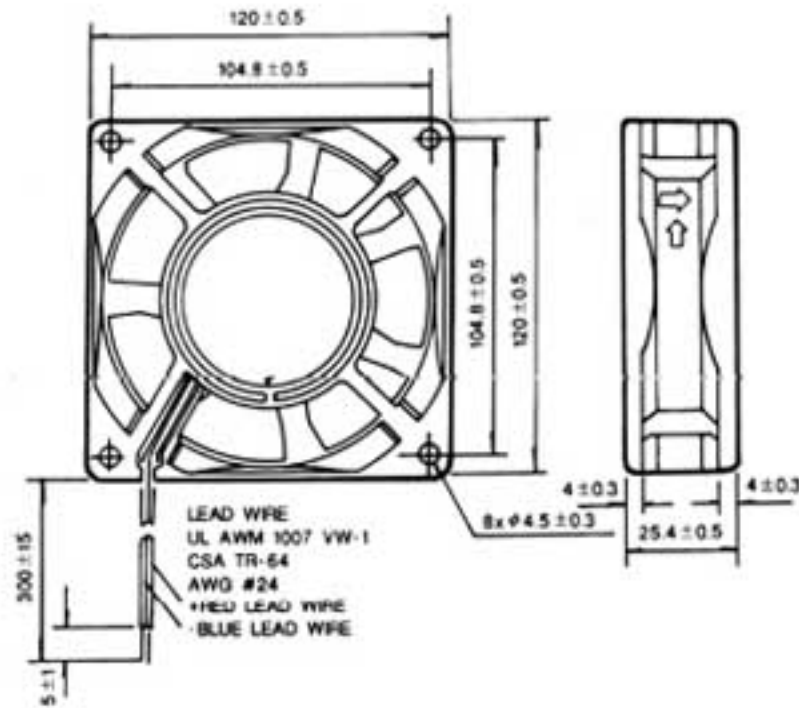

Performance

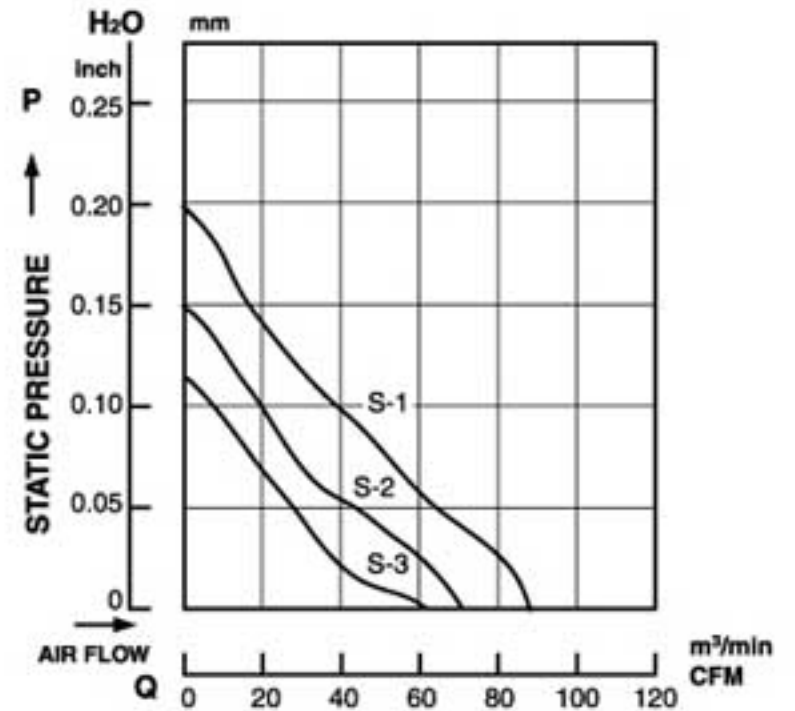

Specifications

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108M/DC (S-1)	12	88	2.5	0.36	4.32	3000	0.20	45
	24	88	2.5	0.24	5.76	3000	0.20	45
FP-108M/DC (S-2)	12	75	2.1	0.25	3.00	2500	0.15	42
	24	75	2.1	0.18	4.32	2500	0.15	42
FP-108M/DC (S-3)	12	62	1.8	0.14	1.68	2000	0.12	25
	24	62	1.8	0.10	2.40	2000	0.12	25