



Sunmoon Lithium Battery

ISO9001 UL CE RoHS

ER14505M

3.6V Primary lithium thionyl chloride High power cell

Benefits

- High energy density
- High voltage, stable during most of the application's lifetime
- Wide range of operating temperature[-55°C ~ + 85°C]
- Low self-discharge rate [less than 1% per year of storage]
- Long storage life [10 years under normal room temperature]

Main application

- Intelligent Instrument and meter
- Memory and standby power
- Alarms and security devices
- Automotive electronics
- Electronic toll collection
- Military devices

Electrical characteristics (23±2°C)

Nominal capacity	1.8Ah
Nominal voltage	3.6V
Maximum recommended continuous current	500mA
Maximum recommended pulse current	1000mA
Operating temperature range	-55 °C ~ +85 °C

UL Component Recognition MH 29130

Physical characteristics

Diameter[max]	14.5 mm
Height[max]	50.5mm
Typical weight	20g

Available terminations

S: Standard terminations

T: Solder tabs

P: Axial pins

Special termination are available upon request.

MSDS is available upon request.

*Customer's Satisfaction
Always Be Our Goal*




Sunmoon Lithium Battery

ISO9001 CE RoHS


ER14505M

3.6V Primary lithium thionyl chloride High power cell

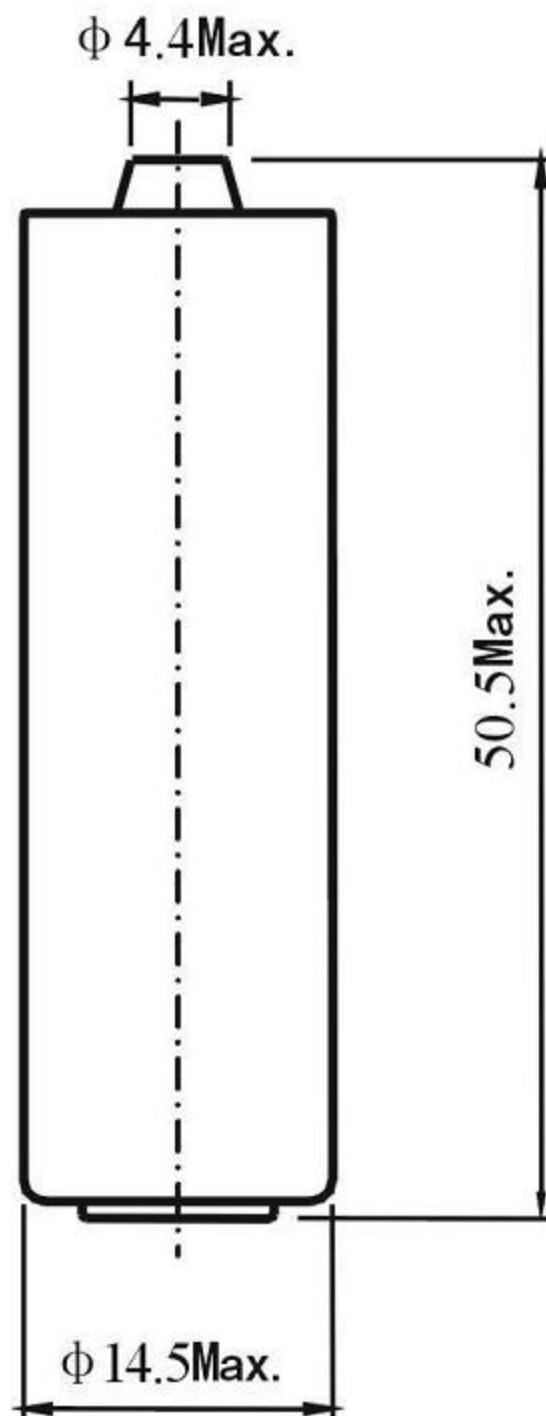


S: Standard termination

Discharge Characteristics at $23 \pm 2^\circ\text{C}$

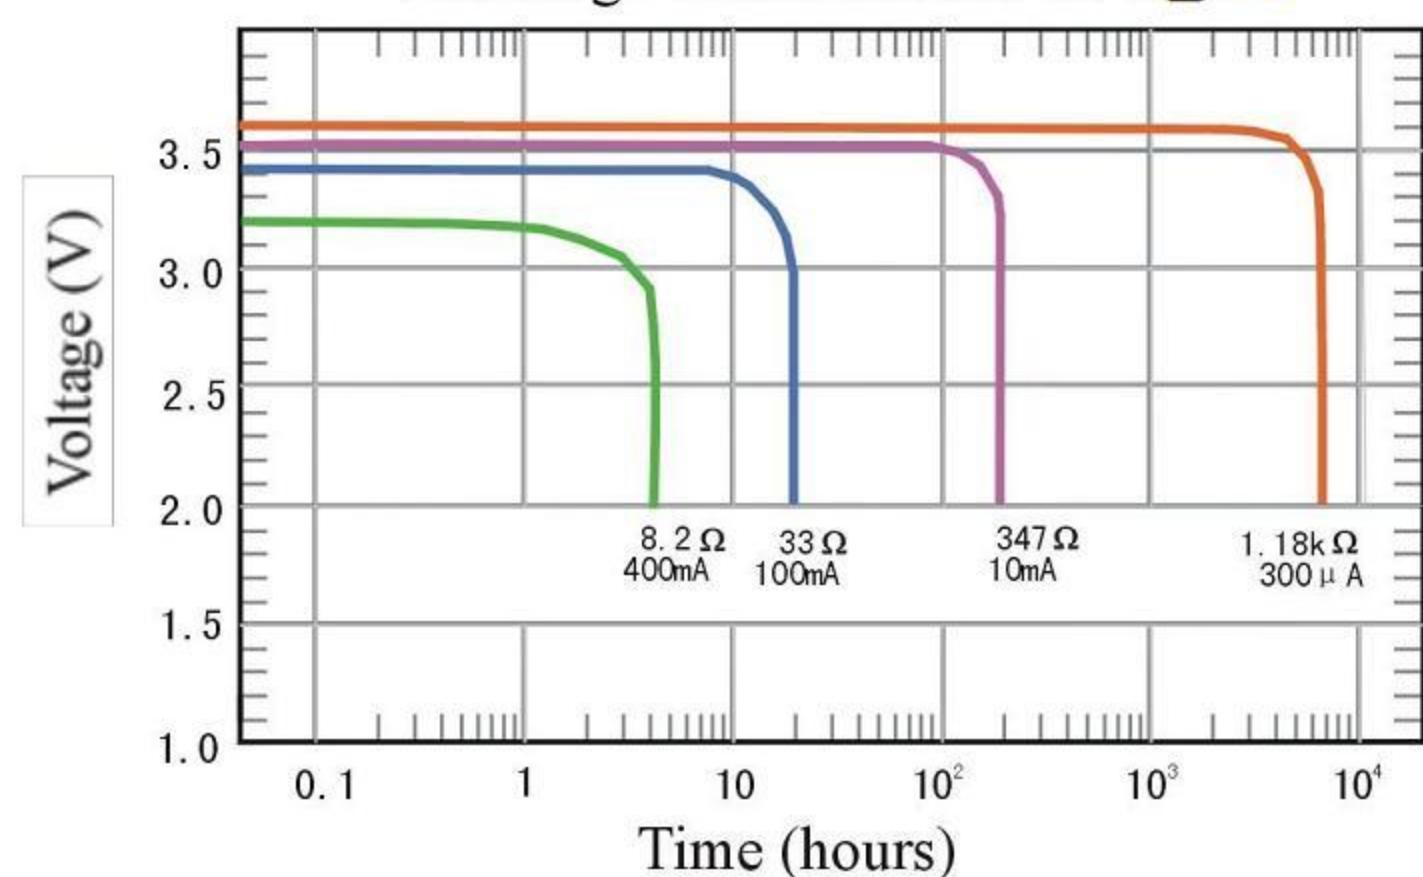


Capacity VS. Current

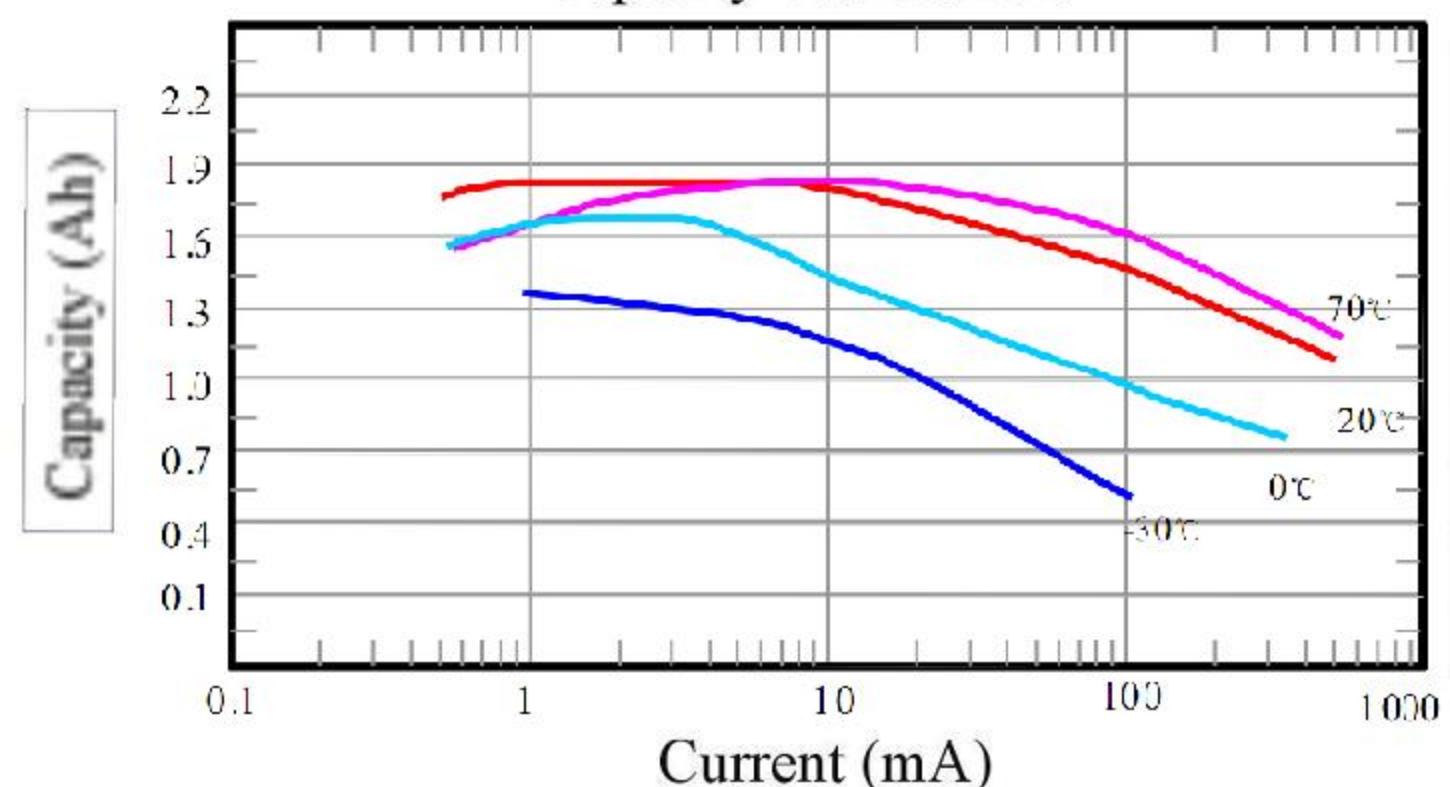

Warning:

- Fire, explosion and burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C , incinerate.
- Do not use the battery beyond permitted temperature range.

Voltage VS. Temperature

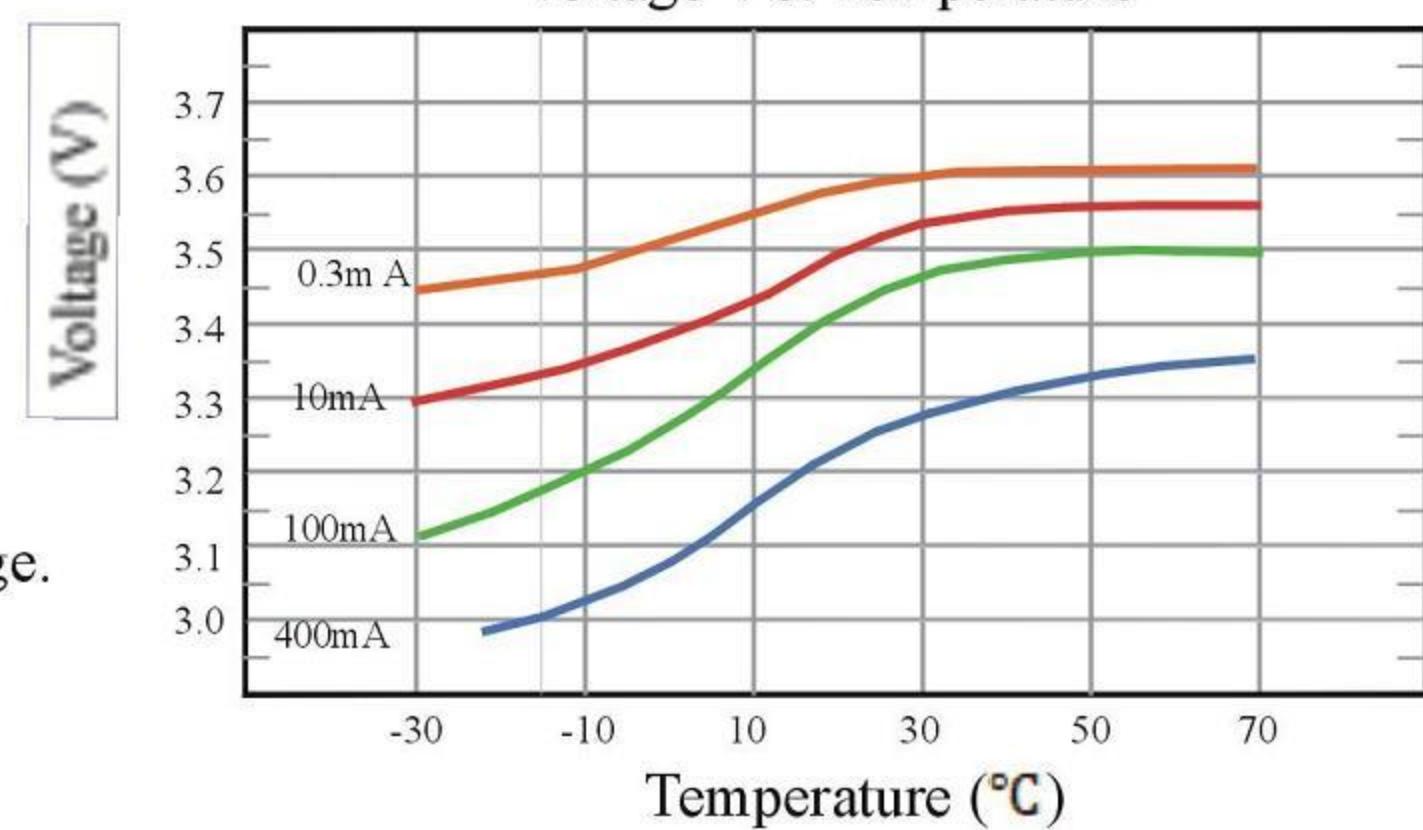

Wuhan Voltec Energy Sources Co., Ltd

Addr: Xinhua Industrial Park, Wuhan Economic & Technological Dev. Zone, Wuhan, China

Post Code: 430056

Tel: +86-27-59405283 59402705

Fax: +86-27-84662179

Website: www.voltec-sunmoon.com

E-mail: sunmoon@voltec-sunmoon.com