



NAIS

**Super miniature design,
SOP(1 Form A) 6-pin type.
Controls load voltage 60V
to 400V**


GU PhotoMOS (AQV210S)



mm inch



×(H) 2.1 mm (W) .173× (L) .248×(H) .083 inch —approx. 25% of the volume and 50% of the footprint size of DIP type PhotoMOS Relays.

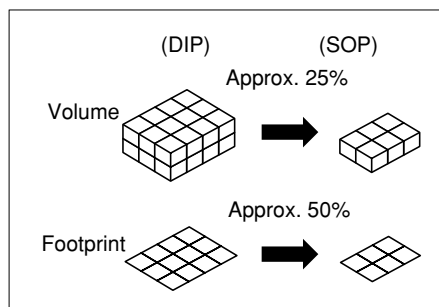

3. Controls low-level analog signals
PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

4. Low-level off state leakage current
In contrast to the SSR with an off state leakage current of several milliamperes, the PhotoMOS relay features a very small off state leakage current of typ. 100 pA even at the rated load voltage of 400 V (AQV214S).

FEATURES

1. 1 channel (Form A) in super miniature design

The device comes in a super-miniature SO package measuring (W) 4.4 × (L) 6.3

2. Tape and reel

The device comes standard in a tape and reel (1,000 pcs./reel) to facilitate automatic insertion machines.

TYPICAL APPLICATIONS

- Telephones
- Measuring instruments
- Computer
- Industrial robots
- High-speed inspection machines

TYPES

Type	Output ratings*		Part No.		Packing quantity in tape and reel
			Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side	
	Load voltage	Load current	1 Form A	1 Form A	
AC/DC	60 V	500 mA	AQV212SX	AQV212SZ	1,000 pcs.
	100 V	300 mA	AQV215SX	AQV215SZ	
	200 V	160 mA	AQV217SX	AQV217SZ	
	350 V	120 mA	AQV210SX	AQV210SZ	
	400 V	100 mA	AQV214SX	AQV214SZ	
	600 V	40 mA	AQV216SX	AQV216SZ	

*Indicate the peak AC and DC values.

Notes: (1) Tape package is the standard packing style. Also available in tube. (Part No. suffix "X" or "Z" is not needed when ordering; Tube: 75 pcs.; Case: 1,500 pcs.)

(2) For space reasons, the top two letters of the product number "AQ" are omitted from the product seal. The package type indicator "X" and "Z" are also omitted from the seal. (Ex. the label for product number AQV214S is V214S).

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	Type of connection	AQV212S	AQV215S	AQV217S	AQV210S	AQV214S	AQV216S	Remarks	
Input	LED forward current	I_F	50 mA							
	LED reverse voltage	V_R	5 V							
	Peak forward current	I_{FP}	1 A						f = 100 Hz, Duty factor = 0.1%	
	Power dissipation	P_{in}	75 mW							
Output	Load voltage (peak AC)	V_L	60 V	100 V	200 V	350 V	400 V	600 V		
	Continuous load current	I_L	A	0.50 A	0.30 A	0.16 A	0.12 A	0.10 A	0.04 A	A connection: Peak AC, DC
			B	0.65 A	0.40 A	0.20 A	0.13 A	0.11 A	0.05 A	B,C connection: DC
			C	0.80 A	0.56 A	0.28 A	0.15 A	0.12 A	0.06 A	
Peak load current	I_{peak}	1.0A	0.90A	0.48A	0.3 A	0.3 A	0.12 A	A connection: 100 ms (1 shot) $V_L = DC$		
Power dissipation	P_{out}	450 mW								
Total power dissipation	P_T	500 mW								
I/O isolation voltage	V_{iso}	1,500 V AC								
Temperature limits	Operating	T_{opr}	-40°C to +85°C -40°F to +185°F						Non-condensing at low temperatures	
	Storage	T_{stg}	-40°C to +100°C -40°F to +212°F							


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV212S	AQV215S	AQV217S	AQV210S	AQV214S	AQV216S	Remarks	
Input	LED operate current	Typical	I _{Fon}	0.7 mA						I _L = Max.	
		Maximum		3 mA							
	LED turn off current	Minimum	I _{Foff}	0.4 mA						I _L = Max.	
		Typical		0.65 mA							
LED dropout voltage	Typical	V _F	1.25 V (1.14 V at I _F = 5 mA)						I _F = 50 mA		
	Maximum		1.5 V								
Output	On resistance	Typical	R _{on}	A	0.83 Ω	2.3 Ω	11 Ω	23 Ω	30 Ω	70 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			2.5 Ω	4.0 Ω	15 Ω	35 Ω	50 Ω	120 Ω	
		Typical	R _{on}	B	0.44 Ω	1.15 Ω	5.5 Ω	11.5 Ω	22.5 Ω	55 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			1.25 Ω	2.0 Ω	7.5 Ω	17.5 Ω	25 Ω	100 Ω	
		Typical	R _{on}	C	0.25 Ω	0.6 Ω	2.8 Ω	6.0 Ω	11.3 Ω	28 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			0.63 Ω	1.0 Ω	3.8 Ω	8.8 Ω	12.5 Ω	50 Ω	
	Off state leakage current	Maximum	I _{Leak}	1 μA						I _F = 0 mA V _L = Max.	
Transfer characteristics	Turn on time*	Typical	T _{on}	0.65 ms	0.60 ms	0.25 ms	0.25 ms	0.25 ms	0.25 ms	I _F = 5 mA V _L = Max.	
		Maximum		2.0 ms	2.0 ms	1.0 ms	0.5 ms	0.5 ms	0.5 ms		
	Turn off time	Typical	T _{off}	0.08 ms	0.06 ms	0.05 ms	0.05 ms	0.05 ms	0.05 ms	I _F = 5 mA V _L = Max.	
		Maximum		0.2 ms							
	I/O capacitance	Typical	C _{iso}	0.8 pF						f = 1 MHz V _B = 0 V	
Maximum		1.5 pF									
Initial I/C isolation resistance	Minimum	R _{iso}	1,000 MΩ						500 V DC		

Note: Recommendable LED forward current I_F = 5mA.

For type of connection

*Turn on/Turn off time

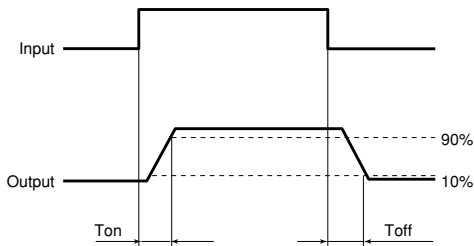


- For Dimensions
- For Schematic and Wiring Diagrams
- For Cautions for Use

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

Type of connection: A

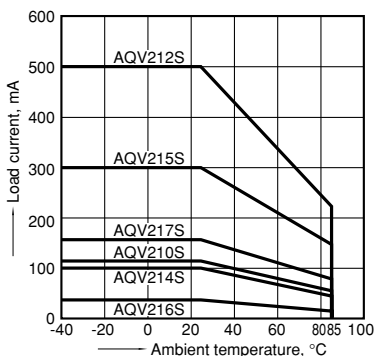


2.-(1) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

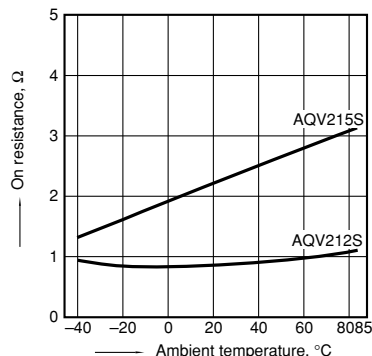

2.-(2) On resistance vs. ambient temperature characteristics


Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

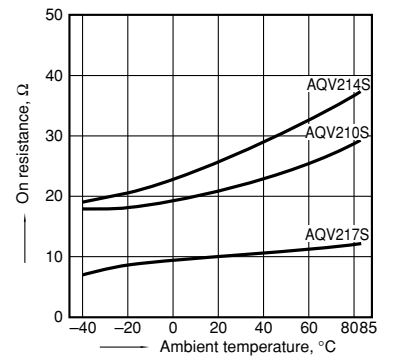

GU PhotoMOS (AQV210S)


2.-(3) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

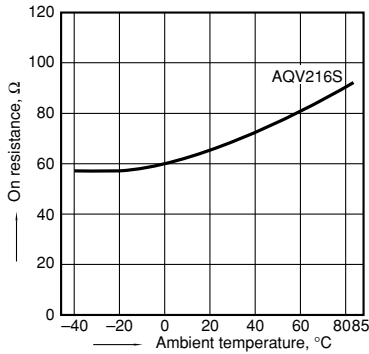


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

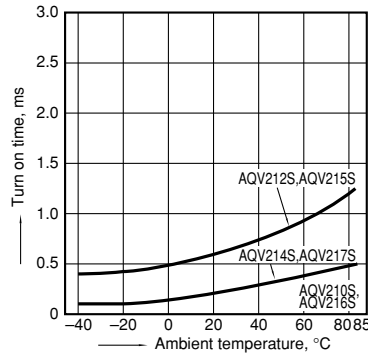


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

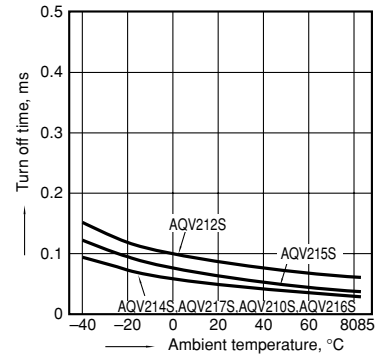


5. LED operate current vs. ambient temperature characteristics

Sample: All types;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

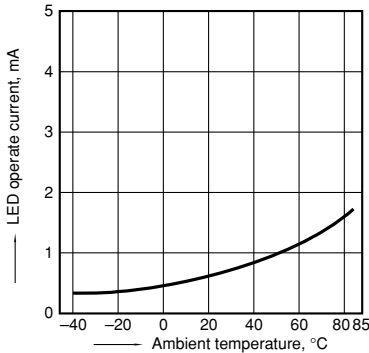


6. LED turn off current vs. ambient temperature characteristics

Sample: All types;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

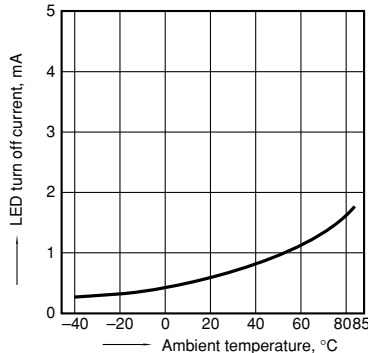


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

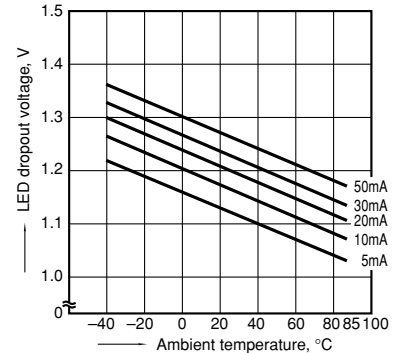


8.-(1). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

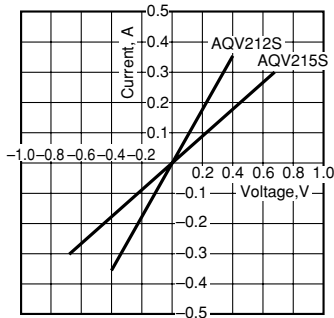


8.-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

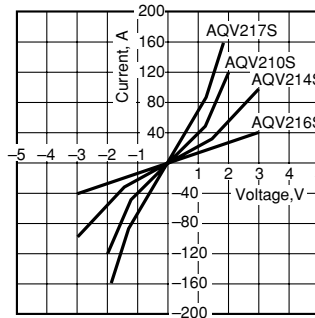


9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

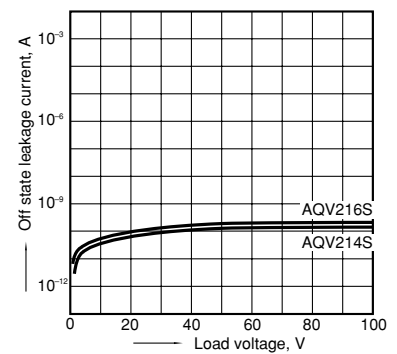


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

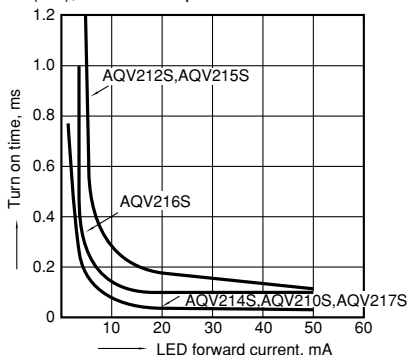

11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

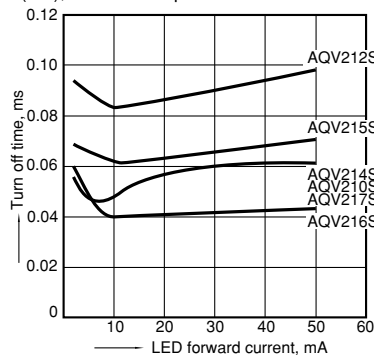

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

